

Arcadia™ Hydrodynamic Separator Installation Guide

AR8 and AR10 Instructions

Concrete Manhole Installation

This installation guide is a reference for installing the Arcadia Water Quality unit into a precast concrete structure. These directions assume the manhole base and riser have been assembled, and that the top slab has not been set.

Note: Do not insert the inlet or outlet pipes until after the Arcadia internals have been installed. All pipes should sit flush inside the manhole. If pipes must be inserted in advance, the pipes should not protrude into the structure as they can interfere with installation of the Arcadia Internals.

Content

Section 1: Internal Components, Hardware & Tools

Section 2: Baffle Pre-assembly for AR10 only

Section 2A: Small Baffle (A)

Section 2B: Large Spoked Baffle (B)

Section 2C: Top Baffle (C)

Section 3: Assembling Internal Components


Section 3A: Rigging and Safety Methods

Section 3B: Assembling Internals

Section 4: Mounting Brackets within Concrete Manhole Riser

Section 5: Transporting Assembled Arcadia Internals

Section 6: Installing Arcadia Internals into the Manhole – For Contactor/Jobsite

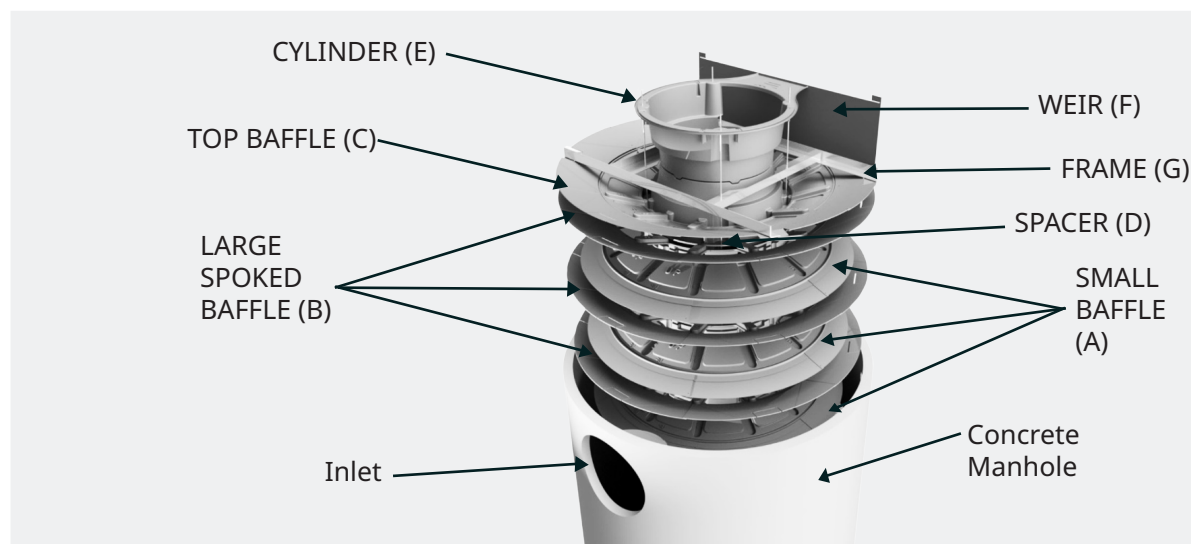

Section 1: Internal Components, Hardware and Tools



Small Baffle (A) Qty: 3



Large Spoked Baffle (B)
Qty: 3



Top Baffle (C) Qty: 1



Spacer (D) Qty: 1



Cylinder (E) Qty: 1



Weir (F) Qty: 1



Frame (G) Qty: 1

Hardware Provided by ADS



Threaded Rod
(4 long and 4 short) Qty: 8



Washers
Qty: 12



Nuts
Qty: 12



Threaded
Coupling
Qty: 4



Screws



Bolts for frame
Assembly



Rod Caps
Qty:4



Threadlocker
Capsules
Qty: 2


AR10 Only




Bolts for plates and
baffles Qty: 130




Nuts Qty: 130



Washers Qty: 260

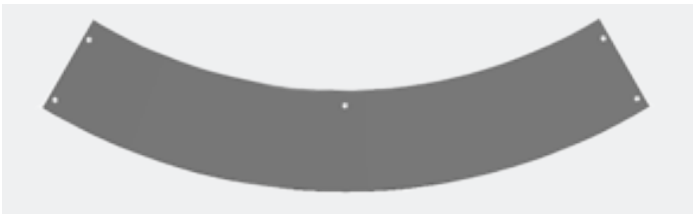

10" (250 mm) Wide Plate Qty: 18

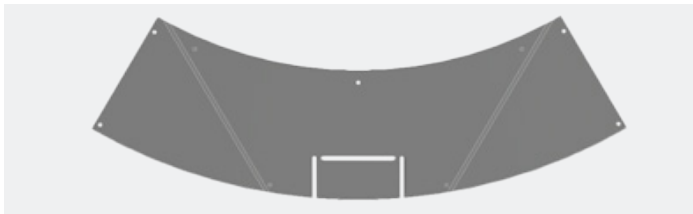

16" (400 mm) Wide Plate Qty: 23

Note: To separate baffles in shipping stack, pull from center of each baffle.

Please set aside the following items that will later be delivered to the jobsite along with the assembled Arcadia Unit.

- Small Hardware package marked "Arcadia Installation, For Jobsite Contractor (Not for Precaster)".
- Conseal Roll(s).
- Copy of the Installation Guide

Other Tools Needed

- $\frac{9}{16}$ " (14.28 mm) and $\frac{3}{4}$ " (19.05 mm) Hand Wrench
- $\frac{7}{16}$ " (11.11 mm) wrench and socket
- Phillips screwdriver or screw gun with Phillips bit
- Drill and $\frac{5}{16}$ " (7.93 mm) and $\frac{1}{2}$ " (12.7 mm) drill bits
- 14' (4.2 m) long lifting straps, guy ropes, or any appropriate lifting or 4-way chain fall

Section 2: Baffle Pre-Assembly

Note: Section 2 is only for AR10 assembly. If assembling an AR8 skip to section 3.

2A: Small Baffle (A)

1. Place small baffle on ground with small “UP” (circled) letters reading correctly as shown in **figure 1**. Note the location of the weir slot (line). You will need to assemble 3 of these baffles.

Note: The small “UP” letters on the edge (Figure 1) will be right-side up, but there are also large “UP” letters in near the middle that will be upside down.

2. Get one of the small plates in **figure 2** (10” (250 mm) wide, no flap cutout). The hole numbers in **figure 2** will be referred to in the following steps
3. Starting opposite the weir slot, place the small plate in the recessed area. There is a registration mark (circled) on the baffle to help you align the center. It is near the manufactured date wheels on the part. Align Hole 2 with the registration mark in **figure 3**.
4. The entire plate should be centered in the recessed portion of the baffle. Push and bend the plate to match the baffle edge in **figure 4**.
5. Drill the 2 hole locations as shown in **figure 5**.
 - Start with hole 2. Use a $\frac{5}{16}$ ” (7.93 mm) drill to drill hole through baffle, using plate as a guide.
 - Bolt with $\frac{1}{4}$ ” x 1.5” (6.35 mm x 38.1 mm) bolt, washers, and nut.
 - Flex plate to match the circumference of the baffle.
 - Drill hole at location 3. **Do not** bolt yet.
6. Add a second plate. The second plate will overlap on top of the first plate. Line up plates and bolt holes 5 (of plate 1) & 4 (of plate 2) together, as shown in **figure 6**. Bolt holes 3 (of plate 1) & 1 (of plate 2) and the baffle together.
7. Drill holes 2 & 3 on the second plate and bolt hole 2, as shown on **figure 7**.
8. The third plate slides **under** the second plate. Continue the pattern all the way around the baffle. Bolt the plates and baffle together until it is one complete piece like in **figure 8**. When you get to bolting the last plate in place, align holes 3 and 5 of the last plate with holes 1 and 4 of the first plate. If the final alignment is not perfect, you may run the drill through the holes to finish installing these last two bolts.
9. This baffle is now done. It must be flipped over so that the large “UP” in **figure 9**, circled, is now reading correctly. With a second person, grab, lift, and flip the baffle assembly.
10. Complete the steps above for the remaining two Small Baffles (A), then move on to 2B.

Figure 1




Figure 2




Figure 3



Figure 4




Figure 5




Figure 6




Figure 7




Figure 8





Figure 9



2B: Large Spoked Baffle (B)

1. Place a Large Spoked Baffle (B) on the ground with small "UP" (circled) letters reading correctly like in **figure 10**. Note the location of the weir slot (line). You will need to assemble 3 of these baffles.
2. Get one of the large plates like in **figure 11** (16" (400 mm) wide, with flap cutout). The hole numbers in **figure 11** will be referred to in the following.
3. Starting opposite the weir slot, place the large plate in the recessed area. There is a registration mark, similar to the one shown in **figure 3**, on the baffle to help you align the center. It is near the manufactured date wheels on the part. Hole 2 aligns with the registration mark. The entire plate should be centered in the recessed portion of the baffle. Push and bend plate to match the baffle edge.
4. Drill the 2 hole locations as shown in **figure 12**.
 - Start with hole 2. Use a $\frac{5}{16}$ " (7.93 mm) drill to drill hole through baffle, using plate as a guide.
 - Bolt with $\frac{1}{4}$ " x 1.5" (6.35 mm x 38.1 mm) bolt, washers, and nut.
 - Flex plate to match the circumference of the baffle.
 - Drill hole at location 3. **Do not** bolt yet.
5. Add a second plate. The second plate will overlap **on top** of the first plate. Line up plates and bolt holes 5 (of plate 1) & 4 (of plate 2) together, as shown in **figure 13**. Bolt holes 3 (of plate 1) & 1 (of plate 2) and the baffle together.
6. Drill holes 2 & 3 on the second plate. Bolt hole 2.
7. The third plate slides **under** the second plate. Continue the pattern all the way around the baffle. Bolt the Plates and Baffle together until it is one complete piece **figure 14**. When you get to bolting the last plate in place, align holes 3 and 5 of the last plate with holes 1 and 4 of the first plate. If the final alignment is not perfect, you may run the drill through the holes to finish installing these last two bolts.
8. This baffle is now done. It does **NOT** need to be flipped over; it is already facing up.
9. Complete the steps above for the remaining two Large Spoked Baffles (B), then move on to 2C.

Figure 10




Figure 11




Figure 12




Figure 13





Figure 14



2C: Top Baffle (C)

1. Place Top Baffle (C) on ground with small "UP" (circled) letters reading correctly in **figure 15**. Note the location of the weir slot (line). You will need to assemble 1 of these baffles.
2. Get one of the large plates in **figure 16** (16" (400 mm) wide, flap cutout). The hole numbers in Figure 16 will be referred to in the following steps.
3. Starting opposite the weir slot, place the large plate in the recessed area. There is a registration mark, similar to the one shown in **figure 3**, on the baffle to help you align the center. It is near the manufactured date wheels on the part. Hole 2 aligns with the registration mark. The entire plate should be roughly centered in the recessed portion of the baffle. Push and bend plate to match the baffle edge.
4. Drill the 2 hole locations as shown in **figure 17**.
 - Start with hole 2. Use a $\frac{5}{16}$ " (7.93 mm) drill to drill hole through baffle, using plate as a guide.
 - Bolt with $\frac{1}{4}$ " x 1.5" (6.35 mm x 38.1 mm) bolt, washers, and nut.
 - Flex plate to match the circumference of the baffle.
 - Drill hole at location 3. **Do not** bolt yet.
5. Add a second plate. The second plate will overlap **on top** of the first plate. Line up plates and bolt holes 5 (of plate 1) & 4 (of plate 2) together as shown in **figure 18**. Bolt holes 3 (of plate 1) & 1 (of plate 2) and the baffle together.
6. Drill holes 2 & 3 on the second plate. Bolt hole 2 shown in **figure 19**.
7. Cut a large plate on the pre-marked line as shown in **figure 20**. Use the hole number guide in **figure 20** for this part. Note: Holes 3 and 5 are in a different location compared to the uncut plate.
8. The third plate slides **under** the second plate. Line up plates and bolt holes 5 (of plate 2) & 4 (of plate 3) together as shown in **figure 21**. Bolt holes 3 (of plate 2) & 1 (of plate 3) and the baffle together.
9. Push this third plate into position. Drill and bolt holes 2, 3 & 5 to the baffle shown in **figure 22**. Bolt positions 3 & 5 are pre-marked, but not pre-drilled.
10. Cut a large plate on the pre-marked line as shown in **figure 23**. Use this hole number guide for this part.

Note: Holes 1 and 4 are in a different location compared to the uncut plate.
11. Add the last 2 plates in the same manner as steps 5, 6, and 8. The final assembly will appear as shown in **figure 24**.
12. The Top Baffle (C) is now complete. It does **NOT** need to be flipped over; it is already facing up. The assembly of the Arcadia unit can continue as each baffle is completed.

Figure 15




Figure 16




Figure 17




Figure 18




Figure 19




Figure 20




Figure 21




Figure 22

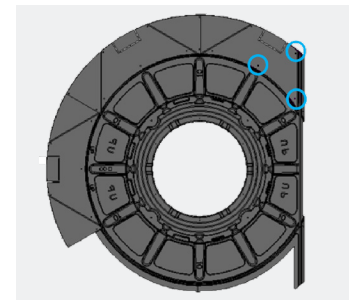


Figure 23





Figure 24

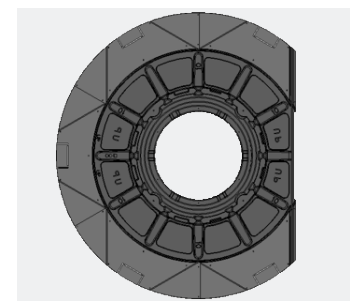

Section 3: Assembling Internal Components

3A: Rigging and Safety Methods

1. Small Baffle (A).

- Use minimum 14' (4.2 m) long straps passed through the center hole and around the baffle edges shown in **figure 25**.
- Alternately for AR10, pass lifting strap between plates and baffle, leaving two bolts between pass-through locations shown in **figure 26 and 27**.
- Guy ropes or more straps may be needed to keep baffle horizontal while lifting.

2. Possible rigging method for Large Spoked Baffle (B) shown in **figure 28**: Rig with lifting straps at least 14' (4.2 m) long, looped through the baffle as shown. Guy ropes or more straps may be needed to keep baffle horizontal while lifting.

3. Rigging for Top Baffle (C) is similar to the small baffles.

Expected weight: The AR8 and AR10 baffles weigh between 73 and 118 lbs, depending on the baffle type and size.

Figure 25





Figure 26



Figure 27



Figure 28



3B: Assembling Internals

*Note: Throughout this procedure, as you stack the baffles, align the molded word UP on each layer with the layer below it. UP should be readable and aligned with previous layers shown in **figure 31**.*

1. Suggested procedure to facilitate assembly:
 - Utilize shipping pallet to support the initial assembly.
 - This step utilizes the Cylinder (E) as a template. Place Cylinder (E) on pallet with flanged side down. Align the 4 holes so they each fall on the wood pallet surface. See **figure 29**.
 - Drill four 1/2" (12.7 mm) holes into the pallet. Set Cylinder aside for later steps. See **figure 30**.

*Note: Before beginning the next step, note that the correct orientation of the Small Baffle is indicated in Section 2A Step 9 (large "UP" reading correctly) **figure 9**.*

2. Rotate the first Small Baffle (A) onto its side and insert the 4 long-threaded rods through the holes in the Baffle from the bottom side. The welded washer ends should be down when the baffle is rotated back to its upright orientation.
3. Place this Small Baffle (A) on the pallet with the molded word "UP" readable and facing upward.
4. Move the threaded rods so the bottom stub drops into the holes in the pallet that were drilled in Step 1. This helps keep the threaded rods standing vertically.
5. Rotate one Large Spoked Baffle (B) as needed to ensure the word "UP" is aligned with the Small Baffle (A) as shown in **figure 31**. Slide the Large Spoked Baffle (B) down the threaded rods until it rests on the Small Baffle (A) as shown in **figure 32**. Each part mates with the previous part in only one orientation.
6. Rotate one Small Baffle (A) as needed to ensure the word "UP" is aligned with the Large Spoked Baffle (B) as shown in **figure 31**. Slide the Small Baffle (A) down the threaded rods until it rests on the Large Spoked Baffle (B) as shown in **figure 33**.
7. Repeat steps 5, then 6, then 5 again such that one more Small Baffle (A) and two more Large Spoked Baffles (B) have been added. The assembly should now have 6 total Baffles installed as shown in **figure 33**.

Figure 29




Figure 30



Figure 31




Figure 32

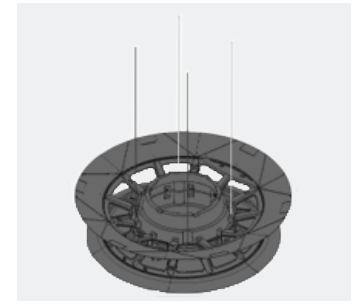

Note: Throughout this procedure, as you stack up the baffles, use the All-Thread Alignment Tool to reach in and align the rod to pass through the baffle holes

Figure 33

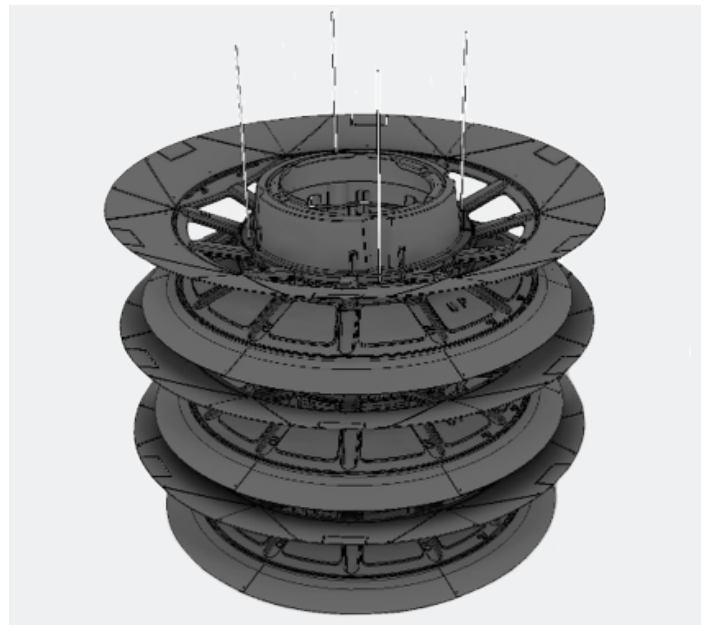

8. Slide Spacer (D) down the long-threaded rods until it rests on the stack of 6 Baffles. The Spacer (D) flange should be oriented down, as shown in **figure 34**.
9. Slide Top Baffle (C) down the long-threaded rods until it rests on the previous part, as shown in **figure 35**. Each part mates with the previous part in only one orientation. Check that the molded word UP, on the outer edge is readable, facing upward, and aligned with the word UP on the previous part before sliding down the rods into position.
10. Grasping each long-threaded rod between baffles, push each rod up until the washer is once again snug at the bottom of the stack, as shown in **figure 36**. Hand snug a washer and nut to each long-threaded rod with a wrench.

Note: Recommended to hold the nut with the wrench and turn the threaded rod to snug

11. For AR10 Only: Add a nut and washer to each threaded rod. The distance measured from the baffle to the top of washer shall be 12.75" (324 mm). See measurement method in **figure 37**.
 12. Two people are needed for this step. Assemble Frame (G) by bolting the 4 metal pieces with provided short bolts, nuts, & washers, as shown in **figures 38 and 39**.
- Note: Make sure the frame is installed upright, with the angled bends pointing upward, as shown in **figure 39**.*
13. Slide Frame (G) onto the threaded rods until it rests flat on nuts and washers added in Step 11. Orient Frame (G) so that it aligns parallel to the flat portion of Top Baffle (C), as shown in **figure 40**.

Figure 34



Figure 35



Figure 36



Figure 37



Figure 38




Figure 39



Figure 40



14. Add another washer and nut to each of the long-threaded rods above Frame (G). Tighten. Then, attach a threaded coupling at the top end of each long-threaded rod. Screw it down until the top of the coupling is flush with the top of the threaded rod. The hardware goes on as shown in **figure 41**.

15. Place a washer and nut onto the end of the four short threaded rods, screwing about 3" (75 mm) down. Orient Cylinder (E) with the flange facing up; feed the rods from the top through the holes in the Cylinder (E) until the nuts rest on top of the Cylinder, as shown in **figure 42**.

16. Place Cylinder (E) assembly on top of Top Baffle (C). Each part mates with the previous part in only one orientation. Check that flat side of the flange of Cylinder (E) is aligned with the flat side of the Top Baffle (C) as shown in **figure 43**. Attach the bottom end of the 4 short threaded rods to each threaded coupling at the top of the 4 long-threaded rods. Hand tighten snug by twisting the long and short threaded rods in opposite directions

17. Secure Cylinder (E) onto each of the 4 short threaded rods with the washer and nut at the top. Hand snug with wrench.

18. Slide Weir (F) into top slot with the curved edge down. Ensure Weir (F) is centered in the slot. To easily insert Weir (F), push one end home and secure lower corner of Weir (F) to Top Baffle (C) with a screw, as shown in **figures 44 and 45**; then push the other end home and secure with screw. Add additional screws into the slot and through the bottom of the weir at approximately the middle, 1/4, and 3/4 positions.

19. Check and hand snug the nuts to the steel Frame (G) with a wrench. Also hand snug the nuts to the top of the Cylinder (E), and to the top of the Top Baffle (C). Add a drop of Threadlocker to the rod threads near each nut before final tightening.

20. Secure the top of Weir (F) with three screws into Cylinder (E), as shown in **figure 46**.

21. Attach Rod Caps to the top of each threaded rod, on top of the unit.

22. The finished assembly should appear as shown in **figure 47**.

Figure 41



Figure 42



Figure 43



Figure 44



Figure 45



Figure 46



Figure 47



Section 4: Mounting Brackets within Concrete Manhole Riser

Materials provided by ADS

- 3/8" (6.35 mm) Diameter 20 thread size, 3 1/4" (82.55 mm) wedge anchors (Qty: 8)
- Brackets (Qty: 4)

Other Tools Needed

- Drill
- 3/8" (6.35 mm) Masonry drill bit
- Hammer
- 9/16" (11.11 mm) socket or wrench
- Masking Tape
- Rigging

1. Use one of the 2 methods below to locate and mark the elevation and center line for each of the 4 brackets. Refer to **figure 48**. For installations with shallow angles between inlet and outlet pipes, such as horseshoe configurations, please refer to the modified instructions in Appendix.

a. Mounting Template Method:

1. Position top of template to match the outlet pipe invert elevation.
2. Align outlet invert mark on template with the center of the outlet pipe hole.
3. Spread template along inner circumference of the manhole wall to one direction (right or left), maintaining level. Affix with tape as you proceed. Check level as you proceed.
4. Mark bracket elevations and centerlines at bottom of template, for the first 2 brackets.
5. Remove template, flip over, and repeat steps 1-4 in the other direction (left or right) to mark the other 2 brackets.

b. Angular Dimensions Method:

1. From the outlet invert, measure depth A (Table 1) and around B° and C° in each direction to locate the top of each bracket. Mark top of bracket.

c. Linear Dimensions Method:

1. From the outlet invert, measure depth A (Table 2) and around the inside arc B" and C" in each direction to locate the top of each bracket. Mark top of bracket.
2. Crosscheck outlet invert elevations from approved job specific drawings.

Figure 48

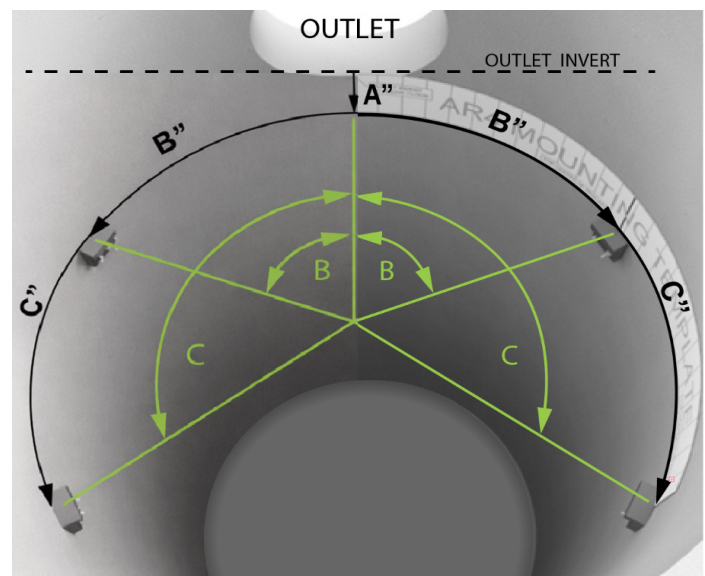


Table 1: Angular Measurements





Arcadia Model	A. Depth from Outlet Invert in (mm)	B. Angle from Outlet Center	C. Angle from Outlet Center
AR8	8 (200)	60°	120°
AR10	9 (228.6)	60°	120°

Table 2: Linear Measurements

Arcadia Model	A. Depth from Outlet Invert in (mm)	B. Measurement from Outlet Center in (mm)	C. Measurement from Outlet Center in (mm)
AR8	8 (200)	50 1/4 (1276)	100 1/2 (2553)
AR10	9 (228.6)	62 3/4 (1596)	125 5/8 (3192)

2. Hold bracket in position in manhole at locations indicated. Mark anchor holes for each bracket as shown in **figure 49**.
3. Drill two 3/8" (9.52 mm) holes per bracket, 2½" (63.5 mm) deep. Diagonal holes are recommended. Extra holes provided if needed as shown in **figure 50**.
4. Attach 4 brackets to manhole at positions marked, aligned with top of bracket. Lightly hammer the anchors in place. Tighten the locking nuts to firmly secure brackets to the concrete. Trim any excess anchor that extends beyond the bracket edge as shown in **figure 51**.
5. Extend center lines up the manhole wall to the top. Also extend lines across top edge. These center lines will be used by installers at the jobsite to align the unit during installation as shown in **figure 52**.

Note: These center lines are part of the bracket installation and should be made with a suitable marking device that can be easily seen, such as a level and marker, or chalk line.

Figure 49**Figure 50****Figure 51****Figure 52**

Section 5: Transporting Assembled Arcadia Internals

Placing assembled Arcadia inside concrete manhole riser section; Most common.

1. Choosing a segment of precast concrete manhole riser or base.
 - For transport, choose a riser section that does not contain the mounting brackets, with the following minimum riser depths. This riser section will serve as shipping containment for the internals.
 - The Arcadia internals will be permanently installed onto the mounting brackets at the jobsite. See Section 6.
2. Rigging Arcadia Internals for lifting.
 - Use the stainless-steel frame arms as pick points for straps, chains or other qualified rigging. It is recommended to attach at diagonally opposite arms.
 - Appropriate rigging examples shown in **figures 53 and 54**.
3. Place Arcadia Internals within the riser segment using hoisting equipment.
4. Secure with strapping.
5. Along with the internals, be sure to also deliver the 3 additional items listed in the note below and seen in **figures 55 and 56**.

Minimum Depth Transport Riser Section ft (m)	Arcadia Model
5 (1.5)	AR8
6 (1.8)	AR10

Figure 53



Figure 54



Figure 55



Figure 56



Note: Please deliver the following additional items to the jobsite along with the assembled Arcadia unit.

- Small hardware package marked "Arcadia Installation, For Jobsite Contractor (NOT FOR PRECASTER)"
- Con Seal roll(s)
- Copy of the Installation Guide

Transporting without a concrete riser?
Contact ADS for guidance.

Table 4: Arcadia Separator Internals Weight Once Assembled

Arcadia Model	AR8	AR10
lbs (kg)	882 (400)	1306 (592.3)

Section 6: Installing Arcadia Internals into the Manhole for Contractor/Jobsite

These directions assume the manhole base and riser have not been assembled, and that the top slab has not been set.

Note: Do not insert the inlet or outlet pipes until after the Arcadia internals have been installed. If pipes must be inserted in advance, the pipes should not protrude into the structure as they can interfere with installation of the Arcadia Internals.

Materials provided by ADS

- Arcadia Internals (Qty: 1)
- $\frac{3}{8}$ " (9.52 mm) Diameter 20 tpi, 3 $\frac{1}{4}$ " (82.55 mm) wedge anchors (Qty: 2)
- $\frac{1}{4}$ " (6.35 mm) Diameter 1 $\frac{1}{2}$ " (38.1 mm) long hex head lag screws and washers (Qty: 4)
- $\frac{3}{16}$ " (4.76 mm) Diameter high speed drill bit for drilling into steel brackets
- Conseal Roll(s)

Other Tools Needed

- Drill
 - $\frac{3}{8}$ " (9.52 mm) Masonry Drill Bit
 - Hammer
 - $\frac{3}{8}$ " (9.52 mm) socket or wrench
 - Rigging
1. Before assembling the manhole base and riser(s), remove the assembled Arcadia unit from the precast segment that was used for protection during transport, if applicable. Rig the Arcadia internals for overhead lifting. Use the stainless-steel frame arms as pick points for straps, chains or other qualified rigging. It is recommended to attach diagonally to opposite arms. See **figures 57 and 58**. Set the Arcadia unit on level ground.
 2. Locate the concrete riser section with Arcadia Mounting Brackets installed.
 3. Begin installation of concrete manholes up to and including the section identified in Step 2.
 4. For the section identified in Step 2, check for bracket centerline markings inside and on top edge of the manhole. If no markings are present, find and extend the centerlines of each bracket along the inside of the riser all the way to the riser top edge as shown. These centerlines will be used to align the unit during installation. See **figure 59**.
 5. Rig Arcadia internals for overhead lifting. Use the stainless-steel frame arms as pick points for straps, chains or other qualified rigging. It is recommended to attach diagonally to opposite arms. See **figures 57 and 58**.

Figure 57



Figure 58



Figure 59





Figure 60



6. Lift Arcadia internals at slow speed. Before lowering the unit into the manhole, check for proper alignment with the mounting brackets inside the manhole. **Orientation is important throughout the entire installation process.**
 - a. Keep the WEIR (F) centered above the outlet pipe opening. See **figure 61**.
 - b. Keep frame arms aligned with bracket centerlines during the entire lowering process. Failure to maintain alignment could result in damage to the unit. See **figure 62**.
7. Once aligned, slowly lower Arcadia internals into manhole. Utilize a spotter to guide the alignment of the unit with tagline. Proceed until the stainless-steel frame arms are resting on the pre-installed mounting brackets within the manhole.
8. Use the provided 1/4" (6.35 mm) drill bit to make a pilot hole in steel brackets. Affix Arcadia internals with provided lag screws and washers through the holes in the ends of the stainless-steel frame arms, through the top plastic of the unit and into the metal brackets beneath. Use 3/8" socket to drive in lag screws until snug see **figure 60**.
9. Skip this step if an optional Trash Screen is installed.

Affix WEIR (F) edges to manhole walls using concrete anchors. See **figures 63 and 64**.

- a. Bend Weir (F) installation tabs to the manhole wall as shown in **figure 63**.
 - b. Mark holes for anchors, one hole per tab.
 - c. Drill a 3/8" (9.52 mm) hole 2 1/2" (63.5 mm) deep at each marked hole.
 - d. Bend Weir (F) installation tabs to manhole wall.
 - e. Insert anchors and lightly hammer in place to secure Weir (F) to manhole wall.
 - f. Tighten the locking nuts to firmly secure brackets to the manhole wall as shown in **figure 64**.
10. Finally, seal Weir (F) & Top Baffle (C) edges to manhole wall using con seal to fill any gaps. See **figure 61**.

Figure 61

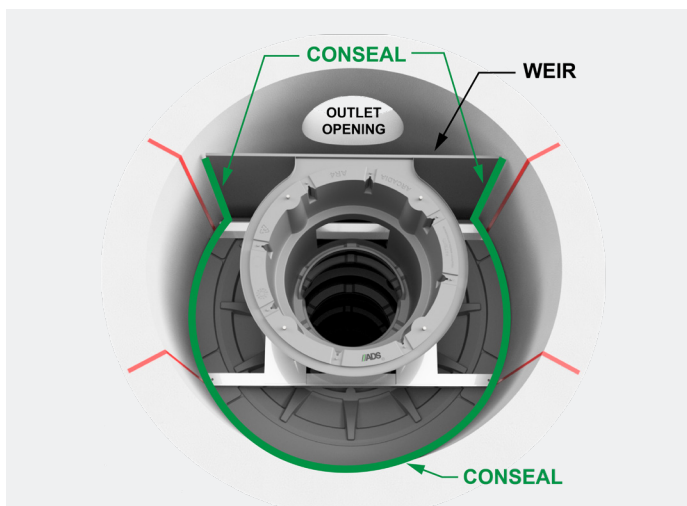


Figure 62

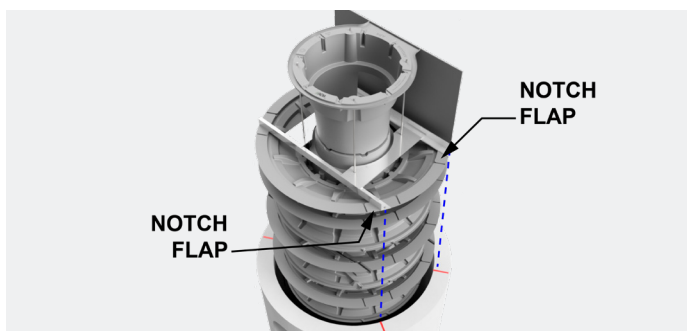


Figure 63


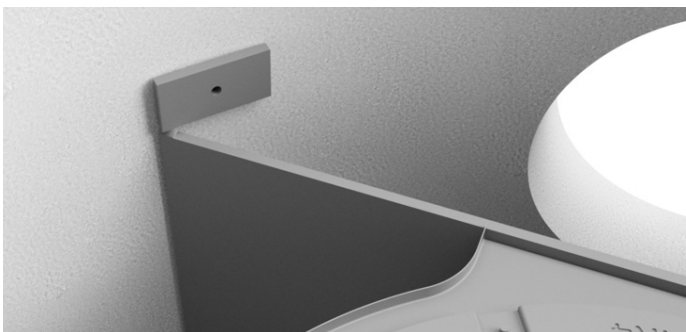


Figure 64

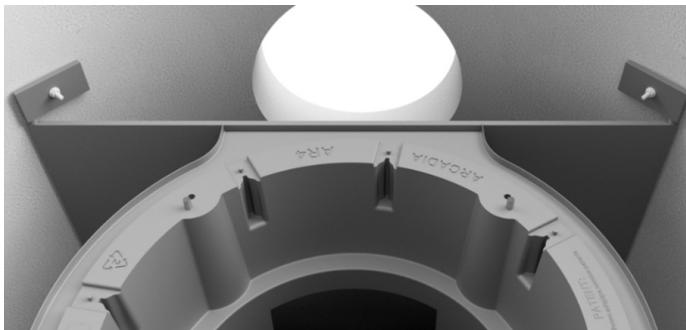

Appendix

For units in a three structure or horseshoe configuration where the outlet pipe is not located perpendicular to the bypass weir, modifications to the instructions in Section 4 are required to ensure the proper placement of the mounting brackets. See **Figure 39**.

Note: The image on the left shows the outlet pipe perpendicular to bypass weir and the right shows it not perpendicular.

First, locate the approximate center between the opening for the outlet pipe and the opening for the nearest inlet pipe. Mark this location. This location will be where the weir wall makes contact with the inside wall of the structure. See **Figure 40**.

From this mark, measure back towards the outlet pipe opening following the angular or length dimension shown in Table 5 corresponding to the specific unit size. Mark this location. This location will serve as the centerline of the outlet opening for the remaining instructions. See Table 5 below and **Figure 41**.

Table 5

Unit Size	Angle α (degrees)	Length in (mm)
AR8	55	$46 \frac{1}{16}$ (1,169.99)
AR10	50	$52 \frac{3}{8}$ (1,330.33)

From this point forward treat this second mark as though it were the centerline of the outlet pipe opening. Proceed following the remaining steps outlined in Section 4 using this mark as a stand in for the outlet pipe opening centerline. It may be necessary to strike a line through this mark level with the invert of the outlet opening to ensure all subsequent measurements are correct.

Figure 39

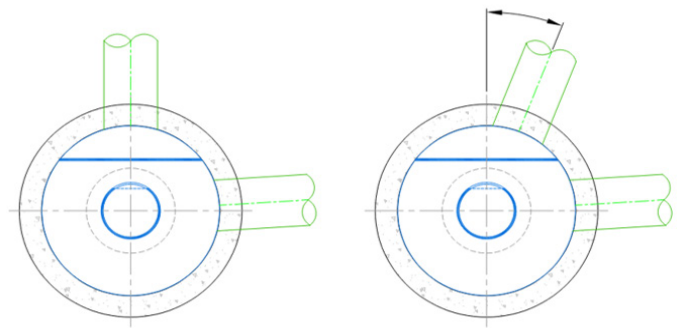


Figure 40


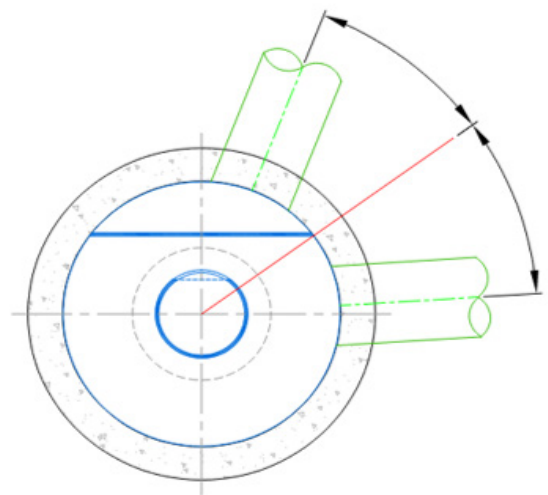


Figure 41

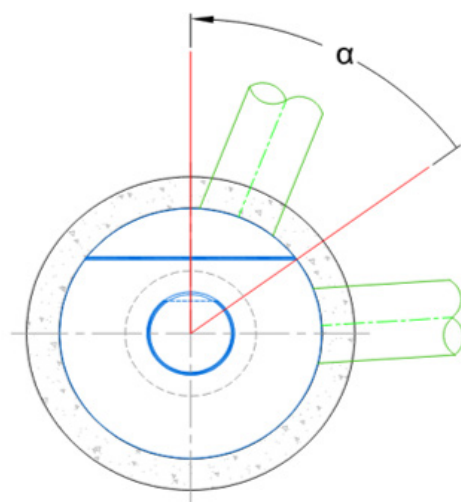

Please note, for units with multiple inlet pipes or units with grated inlets it may be necessary check that the weir placement is correct and does not conflict with these features.

To check for weir conflict with the other inlet pipes, measure from the centerline mark previously created, moving away from the outlet opening, following the same angle or length measurements in Table X. Mark this location. There should now be three marked locations. The first mark will be the location of the edge of the weir once the internals are installed, the second mark will denote the location on the wall that is directly perpendicular to the face of the weir, and the final mark will be the location of the opposite edge of the weir once the internals are installed. Validate that this final marked location does not conflict with the openings for the other inlet pipes. See **Figure 42**.

Figure 42

