

HP Storm Pipe



HP Storm Pipe 300-1500 mm (12"-60") for Storm Applications

Overview

HP Storm is a high-performance polypropylene (PP) pipe for gravity-flow storm drainage applications. HP Storm is the product of choice when premium joint performance and/or greater pipe stiffness is required. HP Storm couples advanced polypropylene resin technology with a proven, dual-wall profile design for superior performance and durability.

Specify HP Storm with confidence based on national standards and approvals. This innovative product meets or exceeds:


- CSA B182.12
- ASTM F2881
- AASHTO M330
- AREMA manual for Railway Engineering Chapter 1

Advanced Dual Wall Profile Construction

HP Storm pipe utilizes a dual wall construction, providing increased pipe stiffness. The additional stiffness and beam strength enhances jobsite performance in stringent line and grade requirements. The pipe profile is completed with a smooth interior which provides additional strength and excellent flow characteristics.

Superior Polypropylene Material

Made from an engineered impact modified co-polymer compound, the superior strength and material properties of polypropylene offer robust pipe stiffness, excellent handling characteristics, and long service life when compared to traditional storm sewer products. It is highly resistant to chemical attack and is unaffected by soils or effluents with PH ranges 1.5 to 14. The unique light grey resin color provides immediate jobsite recognition as well as improving the pipe's interior visibility during post-installation inspection.

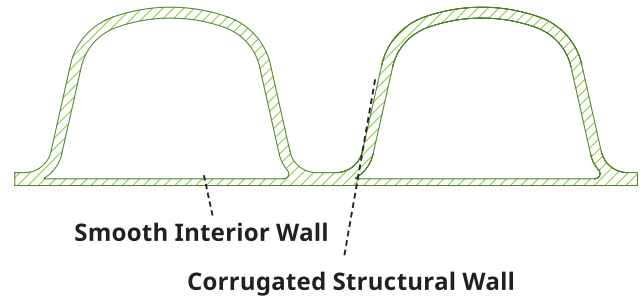

Smooth Interior Wall



Polypropylene Resin

Superior Joint Performance

HP Storm pipe has an extended bell that adds an additional factor of safety within each joint. The joint performance meets or exceeds the 74 kPa (10.8 psi) laboratory performance standards per ASTM D3212 requirements. Third party certification of joint performance is available upon request.

Field verification of joint integrity may be performed using either a 24.1 kPa (3.5 psi) low-pressure air test in accordance with ASTM F1417 or an infiltration/exfiltration water test in accordance with ASTM F2487.

The 6 m (20') lengths aid in speed of installation and reduce the total number of joints.

Fittings

Both standard and custom fittings are available for the HP Storm product line. A complete line of standard Nyloplast® PVC molded fittings are available in the 300-750 mm (12"-30") mainline sizes.

Standard branch laterals are designed to accept SDR-35 or SDR-26 pipe.

Diameter Range

HP Storm is manufactured in diameters of 300-1500 mm (12"-60") and 6 m (20') lengths.

Tap Connections

A standard tapping product, such as Inserta Tee®, is compatible with HP Storm.

Field Couplers

Depending on local requirements, ADS offers a full range of repair coupling options. For soil-tight performance, split couplers and Mar Mac® repair bands are offered. Testable repair couplers are also available, which include stainless steel restraint bands and Nyloplast PVC repair sleeves.

Structure Connections

Storm sewer structure connection requirements vary greatly by region. For soil-tight performance, HP Storm exterior corrugations provide an effective profile for grouted connections. For watertight performance, ADS offers a selection of options utilizing some of the most widely used manhole connectors from companies such as A-Lok®, Trelleborg® and Press Seal® Gasket Corporation.

Structure Connection Standard Detail Drawings are available online and by request.



Typical Inserta Tee® Tap



Field Coupler



Mar Mac Coupler

HP Storm 300-1500 mm (12”-60”) Pipe Specification

Scope

This specification describes 300 to 1500 mm (12- through 60-inch) ADS HP Storm pipe for use in gravity-flow storm drainage applications.

Pipe Requirements

ADS HP Storm pipe shall have a smooth interior and annular exterior corrugations.

- 300 to 1500 mm (12- through 60-inch) pipe shall have a smooth interior and annular exterior corrugations and meet or exceed CSA B182.12, ASTM F2881 and AASHTO M330.
- Manning’s “n” value for use in design shall be 0.012.

Joint Performance

Pipe shall be joined using a bell and spigot joint meeting the requirements of CSA B182.12, ASTM F2881 or AASHTO M330. The joint shall be watertight according to the requirements of ASTM D3212. Gaskets shall meet the requirements of ASTM F477. Gasket shall be installed by the pipe manufacturer and covered with a removable, protective wrap to ensure the gasket is free from debris. A joint lubricant available from the manufacturer shall be used on the gasket and bell during joint assembly. 300 to 1500 mm (12- through 60-inch) diameters shall have an exterior bell wrap installed by the manufacturer.

Fittings

Fittings shall conform to CSA B182.12, ASTM F2881 or AASHTO M330. Bell and spigot connections shall utilize a welded or integral bell and valley or inline gaskets meeting the watertight joint performance requirements of ASTM D3212.

Field Pipe and Joint Performance

To assure watertightness, field performance verification may be accomplished by testing in accordance with ASTM F1417 or F2487. Appropriate safety precautions must be used when field testing any pipe material. Contact the manufacturer for recommended leakage rates.

Material Properties

Polypropylene compound for pipe and fitting production shall be impact modified copolymer meeting the material requirements of CSA B182.12, ASTM F2881 and AASHTO M330, Section 6.1.

Installation

Installation shall be in accordance with CSA B182.11, BNQ 1809-300 or ASTM D2321 and ADS recommended installation guidelines, with the exception that minimum cover in traffic areas for 300 to 1200 mm (12- through 48-inch) diameters shall be 0.3 m (one foot) and for 1500 mm (60-inch) diameters, the minimum cover shall be 0.6 m (2 feet) in single run applications. Backfill for minimum cover situations shall consist of Class 1, Class 2 (minimum 90% SPD) or Class 3 (minimum 95%) material. Maximum fill heights depend on embedment material and compaction level; please refer to Technical Note 2.04. Contact your local ADS representative or visit our website at adspipe.ca for a copy of the latest installation guidelines.

Pipe Dimensions

Nominal Diameter mm (in)	300 (12)	375 (15)	450 (18)	600 (24)	750 (30)	900 (36)	1050 (42)	1200 (48)	1500 (60)
Average Pipe I.D. mm (in.)	310 (12.2)	384 (15.1)	462 (18.2)	612 (24.1)	767 (30.2)	914 (36.0)	1067 (42.0)	1217 (47.9)	1521 (59.9)
Average Pipe O.D. mm (in.)	368 (14.5)	450 (17.7)	544 (21.4)	711 (28.0)	902 (35.5)	1054 (41.5)	1204 (47.4)	1374 (54.1)	1704 (67.1)
Minimum Pipe Stiffness* at 5% Deflection kPa (psi)	482 (70)	413 (60)	386 (56)	365 (53)	320 (46)	275 (40)	241(35)	206 (30)	170 (25)

* Minimum stiffness required per CSA B182.12



adspipe.ca