Inserta Wye™ For CIP Liner Applications


Inserta Wye is a three-piece service connection that provides directional flow and consists of a PVC hub, rubber sleeve and stainless steel band. Inserta Wye is compression fit into the cored wall of a mainline, does not require special tooling and allows for tapping of existing lines without disturbing the bedding.



When utilized with Cured-In-Place Liner applications, Inserta Wyes will provide:

- Reduction in labor hours and pipe materials
- Services connected where needed
- Watertight*, testable connection every time

Installation detail for tapping lined rigid pipe using Inserta Wye

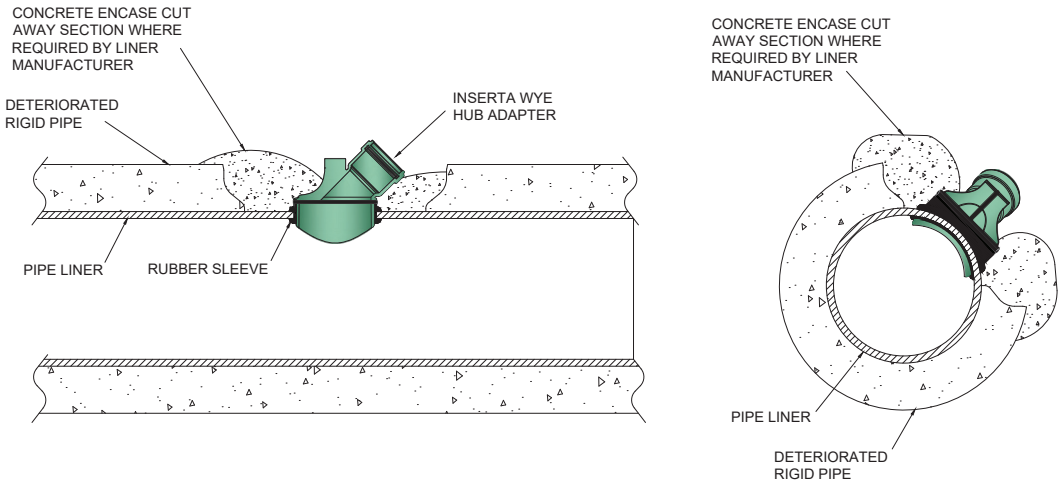

Installation Instructions

1. Mark area to be tapped on surface of rigid pipe. Working area should be 2” (50 mm) wider than Inserta Wye diameter.
2. Break away rigid pipe section to be tapped and expose new liner section.
3. Brush and clean pipe liner surface, removing damaged sections of rigid pipe.
4. Core hole into liner with appropriate Inserta Wye hole saw
5. Install Inserta Wye fitting into CIPP Liner per regular installation instructions. (Place sleeve onto host pipe, aligning gold line perpendicular to mainline. Apply soap solution. Align red line on PVC hub to sleeve’s gold line. Drive hub through rubber sleever to the red “home” line. Place and tighten stainless steel band.
6. Encase cut out section of rigid pipe with concrete where required by liner manufacturer.

* Watertight performance depends on the type and condition of the mainline pipe. Contact your ADS representative about your specific application.

adspipe.com

ADS®, Inserta Wye™ and the Green Stripe are registered trademarks of Advanced Drainage Systems, Inc.
© 2026 Advanced Drainage Systems, Inc. 11351 0826 MH