


ProSTEP™ System

An Integrated Pump Solution

The ProSTEP System harnesses the proven performance of Orenco® ProSTEP pump packages with Infiltrator's ProSTEP Tank to deliver high-performing, yet durable solution for reliable effluent filtration. Designed for long-term use, the system is scalable and customizable to meet both single-residence and municipal needs. ProSTEP is well suited for a wide range of applications, including effluent sewers, pressurized drainfields, mound and aerobic systems, as well as textile, sand, and peat filters.

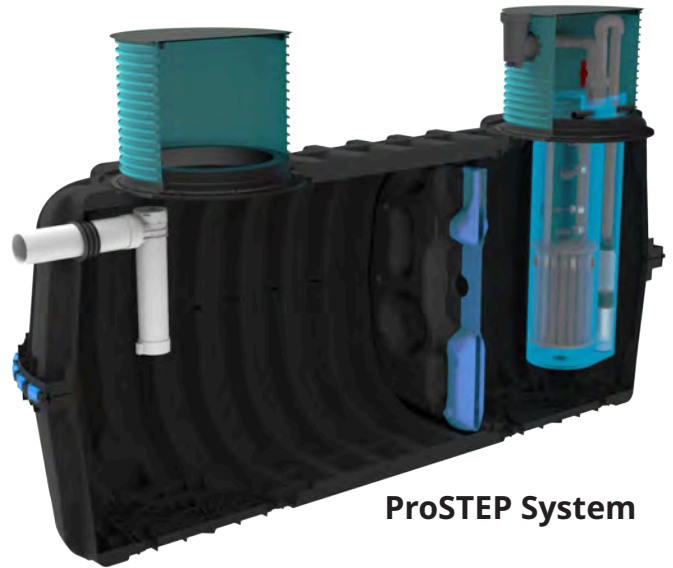

ProSTEP System

Benefits

- **Cost-Effective:** Lightweight equipment reduces installation time and costs while providing superior performance.
- **Reliable Filtration:** Removes up to two-thirds of suspended solids, extending the life of downstream components.
- **Customizable:** Adaptable to various site conditions, with options for advanced monitoring.
- **Environmentally Friendly:** Supports sustainable wastewater management with durable, low-maintenance design.

Features

- **Protects Downstream Systems:** The patented Biotube® filter has several times the capacity of other filters, safeguarding lines, drainfields, and treatment systems from solids.
- **Easy-Access Design:** Service providers can simply remove the filter cartridge without pulling the pump or vault.
Advanced Controls: The package includes optional MVP digital programmable panels for precise parameter settings and VeriComm® remote telemetry panels for 24/7 monitoring, verification, and communication.
- **Complete, Lightweight Package:** Compatible with watertight ProSTEP tanks in 1,000 gallon or 1,500 gallon options.



Pump Package



Control Panel




Access Riser with Tank Shield

 **Infiltrator™**
Water Technologies
Part of **ADS**

infiltratorwater.com • (800) 221-4436

ProSTEP System in Infiltrator Tank – Specifications and Illustrations

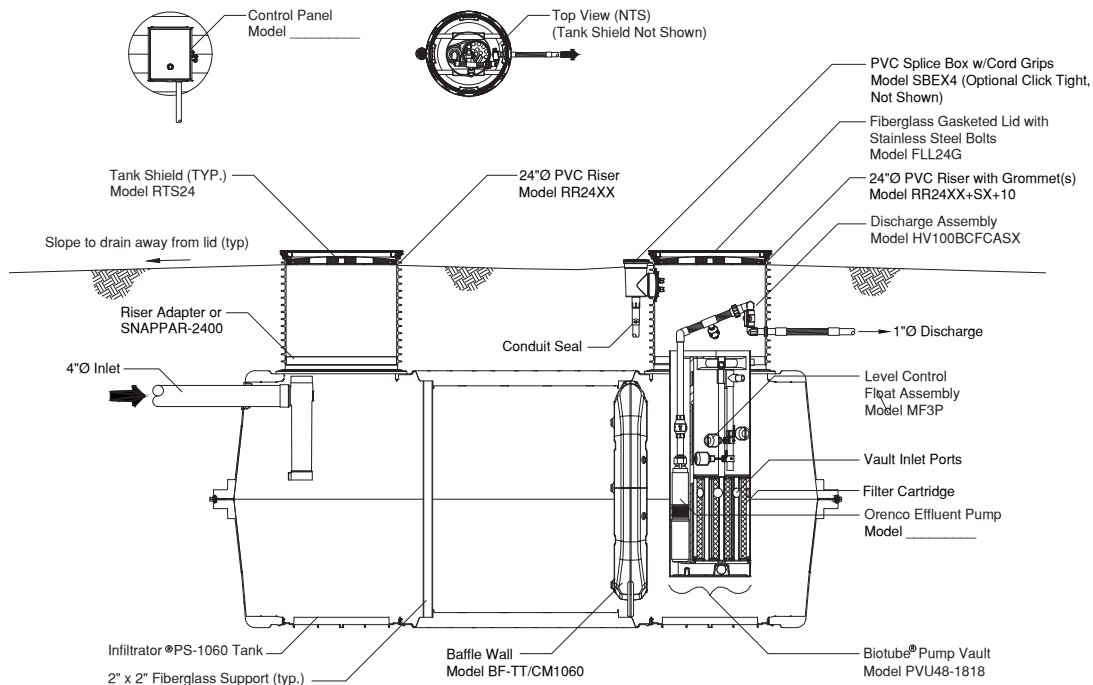

Parameters	PS-1060	PS-1530
Working Capacity	1,111 gal (4,207 L)	1537 gal (5,818 L)
Total Capacity	1,309 gal (4,956 L)	1787 gal (6,765 L)
Airspace	17.8%	16.3%
Length	134" (3,409 mm)	176" (4,460 mm)
Width	62" (1,567 mm)	62" (1,567 mm)
Length-to-Width Ratio	2.3 to 1	2.8 to 1
Height	55" (1,384 mm)	55" (1,384 mm)
Liquid Level	44" (1,118 mm)	44" (1,118 mm)
Invert Drop	3" (76 mm)	3" (76 mm)
Fiberglass Supports	2	4
Compartments	1 or 2	1 or 2
Maximum Burial Depth	48" (1,219 mm)	48" (1,219 mm)
Minimum Burial Depth	6" (152 mm)	6" (152 mm)
Maximum Pipe Diameter	4" (102 mm)	4" (100 mm)
Weight	331 lbs (151 kg)	518 lbs (235 kg)

The ProSTEP Tank is a two-piece, compression- or injection-molded thermoplastic tank designed with a precision mid-seam joint to accept an engineered EPDM gasket. Infiltrator's gasket design leverages proven water-industry technology to ensure a reliable, long-term watertight seal. The two-piece construction is permanently secured using an integrated system of alignment dowels and locking seam clips. ProSTEP Tanks are assembled and distributed exclusively through Infiltrator's network of certified distributors.

Must be backfilled and installed in accordance with the Infiltrator IM- and CM-Series Septic Tank General Installation Instructions. For shallow ground water conditions reference the Infiltrator IM- and CM-Series Tank Buoyancy Control Guidance.

Please visit infiltratorwater.com or scan QR code for the latest information. Visit orenco.com to learn more about pump package options.

