

Saddle Gasket

Advanced Drainage Systems introduces a new saddle gasket that will save on installation time. The gasket fits pipe diameters 300-900 mm (12"-36") and is used for dual wall N-12® (HDPE) and HP Storm (PP). The gasket and pipe can then be installed into the bells of Nyloplast® basins or fittings.

Features & Benefits


- Gaskets fits dual wall N-12 and HP Storm pipe
- Pry hole technology for 600-900 mm (24"-36") is ADS exclusive
- Watertight performance per ASTM D3212
- Product simplification
- Audible "snap" to know when saddle gasket has been installed properly onto pipe
- Manufactured in the U.S.A.

Significant Installation Time Savings

Diameter mm (in)	Valley Gasket Install Time (People Needed)	Saddle Gasket Install Time (People Needed)
300-450 (12-18)	5-10 minutes (1)	<5 minutes (1)
600-750 (24-30)	20+ minutes (2)	<5 minutes (1)
900 (36)	30+ minutes (2+)	<5 minutes (1)

Gasket Comparison

Size mm (in)	New Gasket Code	Old Gasket Code
300 (12)	1258AG	1259AG
375 (15)	1558AG	1559AG
450 (18)	1858AG	1859AG
		1859AGL
600 (24)	2458AG 2458AGL 2458AGHPEP	2459AG
		2459AGL
		2459AGLHP
		2459AGLMH
750 (30)	3058AG	3063MG
900 (36)	3658AG	3660MG
		3665MG

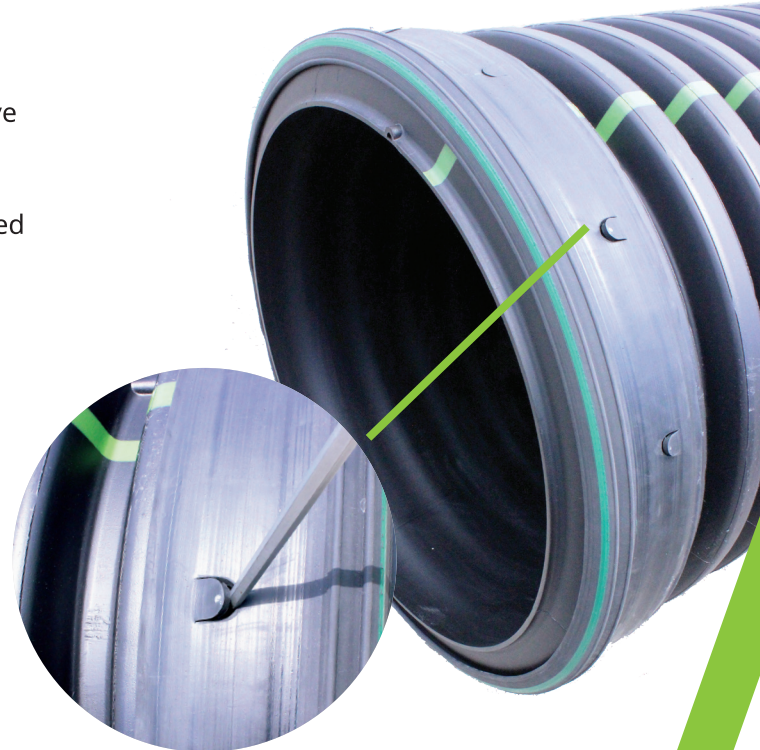

Pictured above is a 600-900 mm (24"-36") saddle gasket.



Scan QR code to view 600-900 mm (24"-36") install video.

