



FILE NAME:

NDS-ts-dura-slope-channel-drain-grate-deco-ville-load-d-iron-612-en



TECHNICAL SPECIFICATION

DURA SLOPE GRATE—"VILLE"

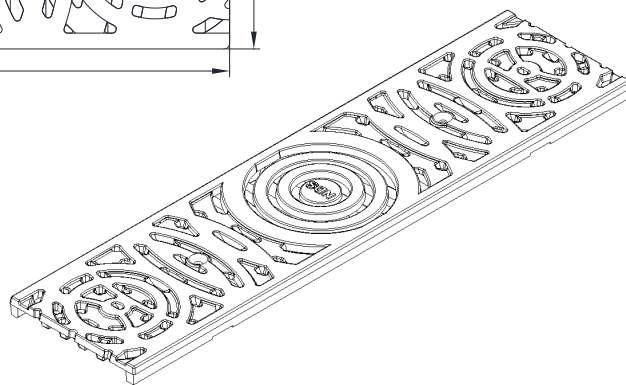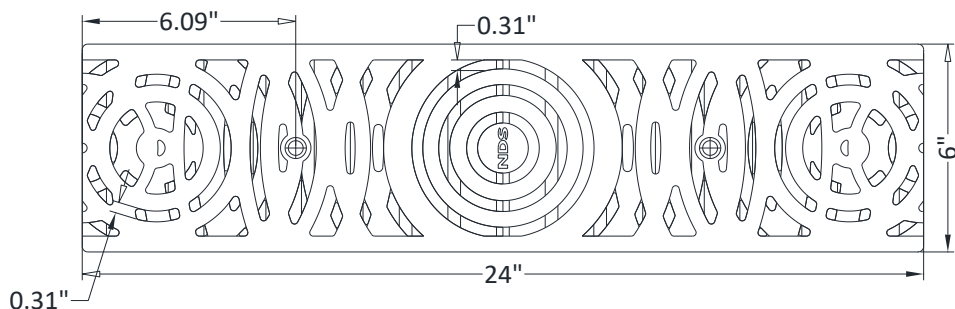

PART NUMBER	SIZE	SLOT WIDTH	LOAD CLASS	OPEN AREA FLOW RATE W/ 1/2" HEAD	WEIGHT	ADA	HEEL PROOF
DS-612-VILLE	6" x 24" x 0.75"	VARIES	C, D*	10.07 IN ² / LINEAR FOOT 30.9 GPM / LF	11.7 LBS	YES	YES

SPECIFICATION:

MATERIAL: DUCTILE IRON 6" x 24" x 3/4"


NDS LOAD CLASS C—LOADS OF 176-325 PSI, RECOMMENDED FOR HEAVY DUTY PNEUMATIC TIRE FORKLIFTS AND TRACTOR-TRAILERS AT SPEEDS LESS THAN 20 M.P.H., H-20 RATED

***NDS LOAD CLASS D** (REQUIRES DS-200H DUCTILE IRON FRAME) - LOADS OF 326-575 PSI. RECOMMENDED FOR HEAVY-DUTY HARD TIRE FORKLIFTS AT SPEEDS LESS THAN 20 M.P.H, H-20 RATED

REQUIRES (2) FH #1/4-20 X 1-1/2" SCREWS #629 (SUPPLIED WITH CHANNEL)

FITS ALL DURA SLOPE CHANNEL SECTIONS AND IN-LINE CATCH BASIN (DS-340)

— 2 GRATES PER 4 FT CHANNEL — MADE IN ITALY



DURA SLOPE "VILLE" GRATE

6 INCH / ADA / DUCTILE IRON / NDS CLASS D

FOR PRODUCT ASSISTANCE, CONTACT NDS TECHNICAL SERVICE AT techservice@ndspro.com, DESIGN ASSISTANCE- designworx@ndspro.com

851 N. HARVARD AVE. LINDSAY, CA 93247 WWW.NDSPRO.COM 1-800-726-1994