
COMPRESSION (CAST-IN) RESILIENT STRUCTURE CONNECTION 12"-60" HDPE N-12 W/ FABRICATED MH ADAPTER

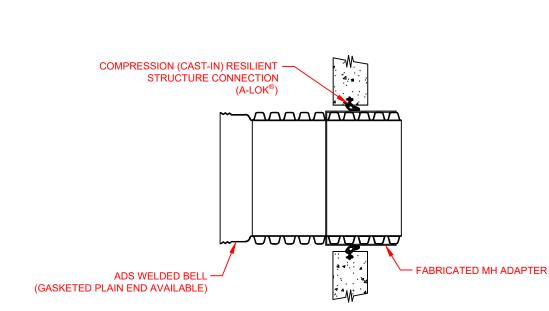

	ADS PRODU	CAST-IN COMPRESSION GASKET			
PIPE SIZE	BELL END	PLAIN END	A-LOK [®] *		
12" (300mm)	1222ANB	1222AN	480		
15" (375mm)	1522ANB	1522AN	580		
18" (450mm)	1822ANB	1822AN	710		
24" (600mm)	2422ANB	2422AN	915		
30" (750mm)	3022ANB	3022AN	1160		
36" (900mm)	3622ANB	3622AN	1350		
36" BNQ/CSA (900mm)	3622ANEAB	N/A	1370		
42" (1050mm)	4222ANB	4222AN	1560		
48" (1200mm)	4822ANB	4822AN	1745		
60" (1500mm)	6022ANB	6022AN	2160		

NOTES:

PERFORMANCE HIGHLY DEPENDENT ON INSTALLATION. CONTRACTOR MUST ENSURE MANHOLE GASKET IS UNIFORMLY SEATED AROUND STRUCTURE ADAPTER. EXTRA PRECAUTIONS MUST BE TAKEN TO PREVENT DIFFERENTIAL SETTLEMENT BETWEEN THE PIPE AND MANHOLE.

SEE STANDARD DETAIL STD-201 AND TECHNICAL NOTE: 5.04 HDPE CONNECTIONS TO MANHOLES AND STRUCTURES FOR INSTALLATION RECOMMENDATIONS.

* THIRD PARTY - CODES AS SUPPLIED BY MANUFACTURER							
A-LOK is a registered trademark of A-LOK Products, Inc. (www.a-lok.com)	6	UPDATED DETAIL AND T	ABLE	AMT	09-09-19		
© 2019 ADS, INC.	REV.	DESCRIPTION		BY	MM/DD/YY	CHK'D	
PROVIDED HEREIN ARE GENERAL RECOMMENDATIONS AND ARE NOT SPECIFIC FOR THIS PROJECT. THE DESIGN ENGINEER SHALL REVIEW THESE DETAILS PRIOR TO CONSTRUCTION. IT IS THE DESIGN ENGINEERS RESPONSIBILITY TO ENSURE THE DETAILS		12"-60" HDPE N-12 COMPRESSION CAST-IN) STRUCTURE CONNECTION		4640 TRUEMAN BLV HILLIARD, OHIO 430			DRAWN WY CKS DATE 10/10/06 GRD BY BOALE NTS
PROVIDED HEREIN MEETS OR EXCEEDS THE APPLICABLE NATIONAL, STATE, OR LOCAL REQUIREMENTS AND TO ENSURE THAT THE DETAILS PROVIDED HEREIN ARE ACCEPTABLE FOR THIS PROJECT.		BER: STD-204A	Advanced Drainage Systems, Inc				SHEET 1 OF 1