



BARRACUDA MAX MINIMUM RIM TO INVERT OUT

MODEL	INCH (MM)
S3	36 (914)
S4	36 (914)
S6	39 (991)
S8	41 (1041)


THE S3, S4, S6, AND S8 CAN BE INSTALLED IN A STANDARD 36" (900 mm), 48" (1200 mm), 72" (1800 mm), AND 96" (2400 mm) PRECAST MANHOLE, RESPECTIVELY. THE S3 AND S4 CAN BE PROVIDED FACTORY INSTALLED WITHIN A 36" (900 mm) AND 48" (1200 mm) ADS HP MANHOLE AND DELIVERED TO THE JOBSITE.

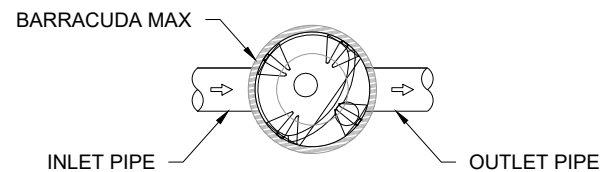

ONLINE CONFIGURATION

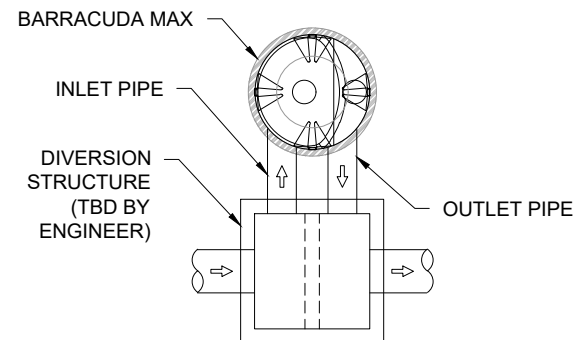


OFFLINE CONFIGURATION

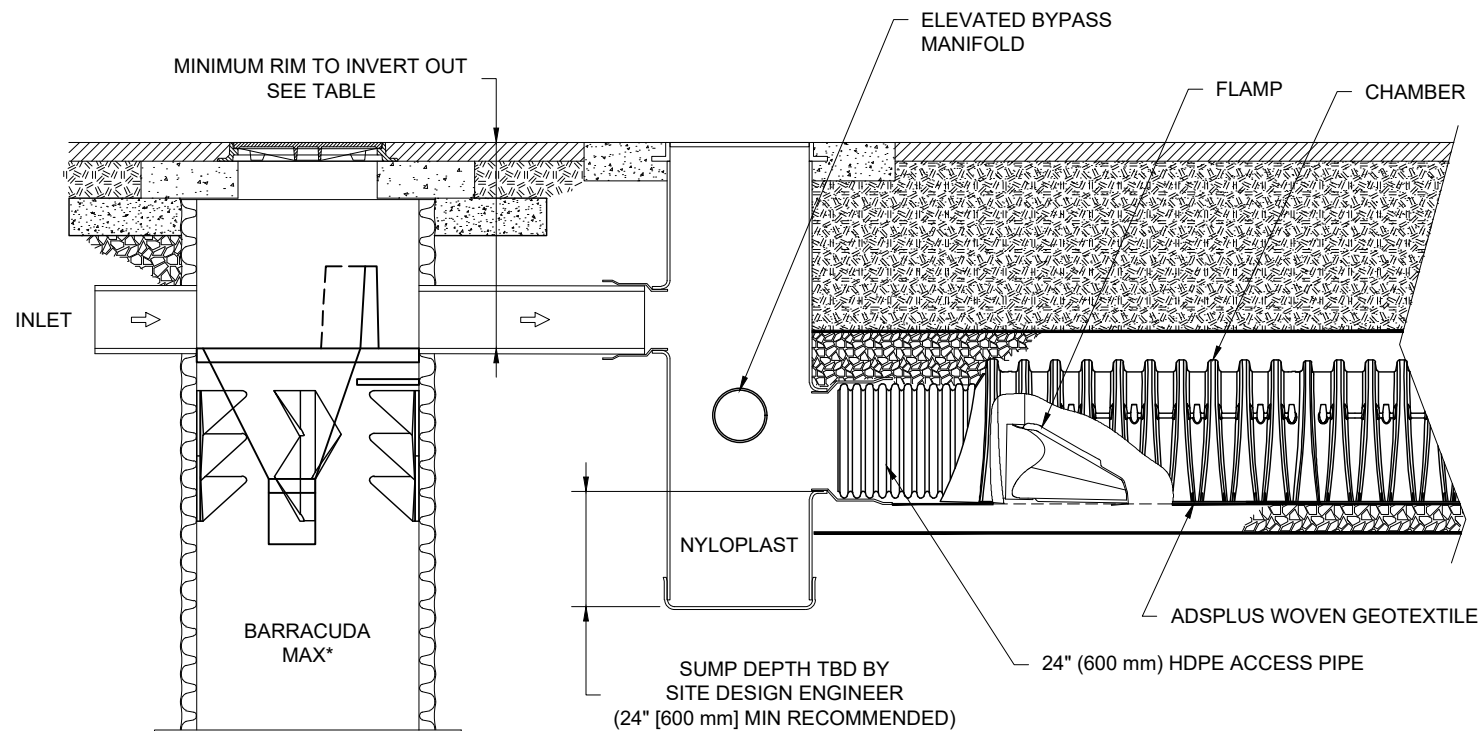

BARRACUDA MAX & ISOLATOR ROW PLUS CROSS SECTION/PROFILE

NTS

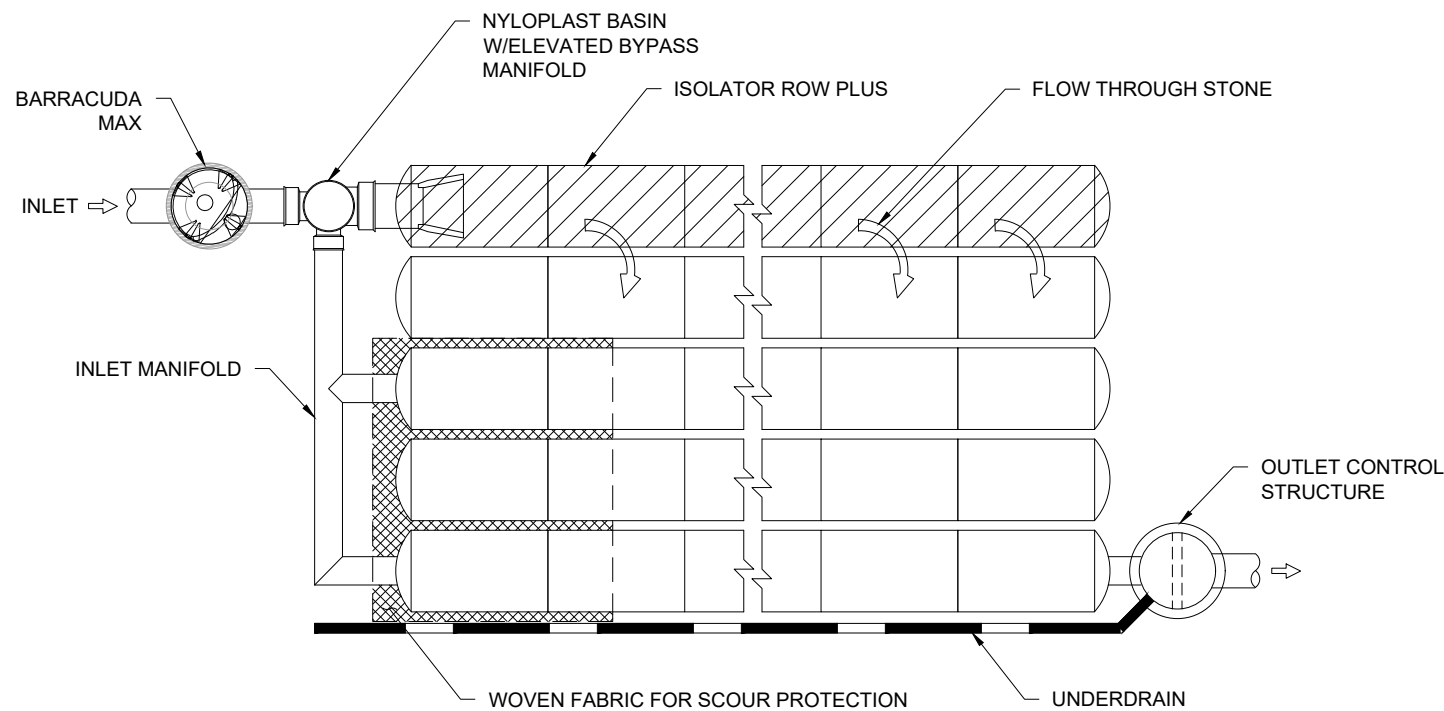

BARRACUDA MAX & ISOLATOR ROW PLUS SCHEMATIC

NTS

ISOLATOR ROW PLUS FLOW RATES			
CHAMBER MODEL	SURFACE LOADING RATE GPM/FT ² (L/S/m ²)	EFFECTIVE FILTRATION TREATMENT AREA FT ² (m ²)	MTFR CFS (L/S)*
SC-160	4.13 (2.8)	11.45 (1.064)	0.11 (2.983)
SC-310	4.13 (2.8)	17.7 (1.644)	0.16 (4.612)
SC-740	4.13 (2.8)	27.8 (2.583)	0.26 (7.244)
DC-780	4.13 (2.8)	27.8 (2.583)	0.26 (7.244)
MC-3500	4.13 (2.8)	42.9 (3.986)	0.40 (11.178)
MC-4500	4.13 (2.8)	30.1 (2.796)	0.28 (7.843)
MC-7200	4.13 (2.8)	50.0 (4.645)	0.46 (13.028)

* PER CHAMBER LOADING RATES BASED ON NJCAT VERIFICATION TESTING OF THE STORMTECH SC-740 ISOLATOR ROW PLUS IN ACCORDANCE WITH NJDEP LABORATORY PROTOCOL TO ACCESS TOTAL SUSPENDED SOLIDS REMOVAL BY FILTRATION MANUFACTURED TREATMENT DEVICES, 2013.

KEY BENEFITS OF THE BARRACUDA MAX

- SINGLE MANHOLE DESIGN
- VARIABLE INLET/OUTLET ANGLE CONFIGURATIONS (NOT JUST 180 DEGREE ORIENTATION)
- INTERNAL BYPASS FOR INLINE INSTALLATION (WHERE APPLICABLE)
- ALL UNITS CAN BE INSTALLED INTO A STANDARD PRECAST MANHOLE
- 3' & 4' UNITS CAN BE FACTORY FABRICATED IN HP MANHOLES FOR QUICK DELIVERY WITH A LIGHT, EASY TO INSTALL STRUCTURE
- IN-STOCK COMPONENTS FOR QUICK DELIVERY
- NO ELEVATION LOSS BETWEEN THE INLET AND OUTLET
- SURFACE INSPECTION AND MAINTENANCE WITH NO CONFINED SPACE ENTRY
- DESIGNED FOR EASY MAINTENANCE USING A VACUUM TRUCK OR SIMILAR EQUIPMENT
- FIELD ENGINEERS AND INTERNAL ENGINEERING SERVICES DEPARTMENT TO ASSIST ENGINEERING WITH SIZING/DETAILS

BARRACUDA DESIGN TOOL

<https://www.ads-pipe.com/water-quality-design-tool>

BARRACUDA MAX TREATMENT FLOW (80% TSS)

MODEL	CFS (L/s)
S3	0.85 (24.1)
S4	1.52 (43.0)
S6	3.40 (96.3)
S8	6.08 (172.2)

BARRACUDA MAX CAN BE CONFIGURED WITH AN OIL POUCH OR TRASH GUARD FOR ENHANCED TREATMENT.

KEY BENEFITS OF A BARRACUDA MAX & ISOLATOR PLUS DESIGN

- ENHANCED SEDIMENT REMOVAL BY COMBINING TWO INDUSTRY PROVEN DEVICES
- EXTENDED MAINTENANCE CYCLES
- EASY TO INSTALL AND CONFIGURE TO SPECIFIC SITE CONSTRAINTS
- ONLINE DESIGN TOOLS ALLOW DESIGNERS TO EASILY CREATE LAYOUTS AND DETAILS

KEY BENEFITS OF STORMTECH CHAMBERS

- LARGE FAMILY OF CHAMBERS TO FIT YOUR SITE
- EASILY CONFIGURABLE FOR IRREGULAR SHAPED BEDS
- MEETS PRODUCT REQUIREMENTS OF ASTM F2418 AND ASTM F2922 AND DESIGN REQUIREMENTS OF ASTM F2787
- EXCEED AASHTO LRFD DESIGN SPECIFICATIONS FOR HS-20 LIVE LOADS & DEEP BURIAL EARTH LOADS
- PATENTED ISOLATOR ROW PLUS FOR LESS FREQUENT MAINTENANCE, WATER QUALITY AND LONG-TERM PERFORMANCE
- THIRD PARTY VERIFIED PERFORMANCE
- FIELD ENGINEERS AND INTERNAL ENGINEERING SERVICES DEPARTMENT TO ASSIST ENGINEERING WITH LAYOUTS

STORMTECH DESIGN TOOL

<https://designtool.ads-pipe.com/>

STORMTECH® + WQ STD DETAIL
BARRACUDA® & ISOLATOR ROW PLUS®
DATE: 2/10/22 DRAWN: KLJ CHECKED: KMS
PROJECT #: N/A

DATE	DRWN	CHKD	DESCRIPTION



4640 TRUJEMAN BLVD
HILLIARD, OH 43026

THIS DRAWING HAS BEEN PREPARED BASED ON INFORMATION PROVIDED TO ADS UNDER THE DIRECTION OF THE SITE DESIGN ENGINEER OR OTHER PROJECT REPRESENTATIVE. THE SITE DESIGN ENGINEER SHALL REVIEW THIS DRAWING PRIOR TO CONSTRUCTION. IT IS THE ULTIMATE RESPONSIBILITY OF THE SITE DESIGN ENGINEER TO ENSURE THAT THE PRODUCT(S) DEPICTED AND ALL ASSOCIATED DETAILS MEET ALL APPLICABLE LAWS, REGULATIONS, AND PROJECT REQUIREMENTS.