

Create Challenge

WHEN remodeling a shopping center in Hagerstown, Maryland, engineers needed to design a storm water detention system that would handle the expanded site's storm water runoff as well as the surrounding area's.

The trick was that there was no more land available to accommodate the larger system. Consulting engineers J. Michael Brill & Associates (Mechanicsburg, Penn.) came up with the solution; if you can't spread out, go underground. The area's karst topography, however, also presented a challenge because the prevalence of sinkholes would limit infiltration and the depth of the underground system.

The new Martin's Food Store complex set to open in November 2008 is one of the first centers in Washington County, Maryland to use a subsurface structure to control storm water runoff. The system was built using corrugated high-density polyethylene (HDPE) pipe to solve the multi-pronged problem of a small footprint, an increase in water volume and the area's challenging topography.

Previously, the property contained a Gold's Gym and utilized a surface detention pond for storm water runoff. The newly invigorated center has six retail stores in addition to the Martin's Food anchor. Construction of the subsurface storm water detention system started onsite in February 2008 and was completed three weeks later.

As construction of the center was being planned, the Maryland State Highway Administration (SHA) was also making plans to widen the road. The SHA required water runoff from this expansion of Pennsylvania Avenue to

additional burden.

"We had an existing footprint of about eight acres for the site that included the surface detention basin," explained David J. Habowski of J. Michael Brill, who was responsible for the site's development. "Now, we were faced with a more highly trafficked food store and other shops which would need additional parking. This expanded area would mean a higher volume of water runoff from the larger parking lot, plus even more water runoff from the road that SHA wanted the

pond so we definitely had to utilize a subsurface system.

"We always want to use best management practices to maintain water quality," he said. "Because the geotechnical report came back as karst geology – prone to sink holes – we weren't allowed to infiltrate. So we used large diameter pipe as storage rather than an open bottom or perforated system. We're collecting all the water runoff from onsite – and most of the area within the state road out in front of our site – and conveying it into our system."

The components specified were primarily high-density polyethylene (HDPE) pipe because Washington County does not allow the use of metal piping underground. Metal pipe can corrode while HDPE pipe is impervious to corrosion and will provide a watertight system.

For the site layout, Habowski had a lot of improvements to take into consideration due to the large Pennsylvania Avenue widening project. The county was to make it into a highway with two through and two turning lanes from the original, two-lane road with a single turning lane.

"Because of this county project, the drainage from the state highway right-of-way couldn't be contained near that road, so we had to convey it into the onsite subsurface facility," he said. "Now, all the drainage associated with the widening of Pennsylvania Avenue would be collected and brought into our system."

Before the Martin's Food project and the road expansion, water was running into storm drains under adjacent North Pointe Drive and down the opposite side of the street where there is another shopping center and into its pond, and



The storm water detention system for a new food store complex was built using 48-inch corrugated HDPE pipe and installed under the parking lot to maximize retail space.

site to handle. The question was how to fit more parking and more retail space in the same area while taking care of an increase in storm water runoff, and dealing with the sinkhole situation. We had our work cut out."

Habowski and his team found that putting the storm water system underground would provide the solution.

"In this particular situation we didn't have a lot of room to work with because of the site conditions. It was a fairly small area for the size of this 85,000 square foot building; we didn't have a lot



A field of pipe waits to be installed for the new shopping center in Hagerstown, Maryland. More than 6,200 feet of 48-inch diameter corrugated HDPE pipe from ADS was used to construct the storm water detention system.

“Maryland requires that the first flush be handled to protect the land from excessive erosion caused by the increased flow of water,” Habowski explained. “This is a standard called the CPv – channel protection volume – that requires runoff volume from a one-year frequency, 24-hour storm be captured and discharged in a controlled manner during no less than a 24-hour period, so you have to set an orifice down at the bottom of the outlet structure. For the system’s subsurface outlet structure we have a 6 by 9 foot box which has a baffle and orifice at the bottom to handle the CPv. The weir plate

handle certain storm events, and acts as a trash rack as well.”

Design of the System

The HDPE pipe detention system weir plates are baffles with a ‘V’ at the top so that when water comes over the top it spills into the next area.

“This acts as a trap,” explained Mike Batie, P.E., CFM, technical and engineering manager for the Plastics Pipe Institute (PPI), a non-profit advocacy group for the plastic piping industry. “It separates oils and greases that may get into the system and will be taken out later as well as organics and trash. This saves the owner a lot of cleanout and maintenance for the system and helps to meet EPA, state and city regulations.”

Half of the water from the site goes directly into the underground system of 48 inch HDPE pipe sections connected by a manifold system. And the other half of

the site goes through a sand filter that cleans sediment from the water then releases it into the subsurface.

According to the plans, the facility will be inspected twice a year, March and September, with a vacuum truck during a dry period to clean up sediment and debris.

The system is

uses 6,200 feet of 48-inch corrugated HDPE pipe from PPI member company Advanced Drainage Systems, Inc. (ADS) in the structure that enables the system’s capacity to handle a 100-year storm event. The system is set up on a grid pattern with the pipe in a crosshatch design. Water runoff comes in from five manholes to the manifold and into the branches also called laterals.

“You can see from the volume requirement for water storage that the footprint for the system would have required a vast area of valuable land if the open pond was kept,” explained Tony Radoszewski, executive director of PPI. “This probably would have meant that one or several of the rent-paying stores might not have been built if a typical retention pond was used.

“Putting it underground provides the owners with two benefits – maximizing the land’s potential and retaining the visual appeal of the center. An underground system also helps the environment because it can trap debris. We’re finding that more and more sites are choosing underground systems because of these advantages and the long life they are afforded by the durable HDPE pipe.

“Each HDPE pipe section is around 20 feet long so there are fewer joints. This reduces labor and easily provides a secure, watertight system. Reinforced concrete pipe (RCP) comes in smaller 8-foot sections and weighs considerably more. Costs can easily be 35 percent more to use and install RCP than corrugated HDPE pipe,” Radoszewski explained.

The hole was excavated to a depth of 14 feet with six inches of stone used as a bed. “Because we were dealing with an area close to the size of a football field we had to use a stone shooter for the bed and later to provide the cover layer on top of the HDPE pipe,” said Dirk Mowen, site supervisor for Kinsley Construction, who installed the system. “The six-inch top layer of stone acts as a filter to separate contaminants. It’s then covered with geotextile and then back filled with native soil.” Number 57 stone was used for the bottom to fill in between the pipe runs



easy to handle, we were able to install the pipe and concrete catch basins, tie in the branches and finish to a ready-to-pave point within a few weeks," Mowen said.

A series of 24 laterals, which are made of 48-inch diameter HDPE pipe, act as the storm water detention chamber and are connected to the main manifold which is fed by the five manholes. All connections between the corrugated HDPE pipe sections and to the manifold are watertight bells with ASTM F477 gasketed fittings.

"Usually 60-inch diameter pipe is called on for these types of subsurface systems," stated Habowski. "But because of the topography we needed to go with a smaller pipe. We just put in more laterals. Again, because this system would be



Lateral sections of HDPE pipe are put into place and connected to the storm water detention system's manifold.

under the parking lot, it didn't matter how much area we used.

"In this particular case, Washington County, Maryland, does not allow the use of metal piping underground. They accept only HDPE or concrete and it is written in the ordinance. Because of the

Mowen's crew. "It was very easy to position the pipe sections and make the connections. Basically, the laterals just slipped into the bell ends of the manifold and made a watertight seal."


Not only is the weight of pipe an issue for the on-site crew, it is also a

would work, Habowski related.

"We basically used a crew of six with a Caterpillar 330 track hoe excavator for the majority of the installation," related Kinsley's Mowen. "The key to this efficient installation was that the manifold with the pipe connections for the laterals was pre-made in the plant, and came to us ready to put in the pit."

The largest pipe sections that are 20 feet long weigh 620 pounds and were lifted by the track hoe and guided into place by

CUT MATERIAL INSTALLATION COSTS BY AS MUCH AS 40%...OR MORE.

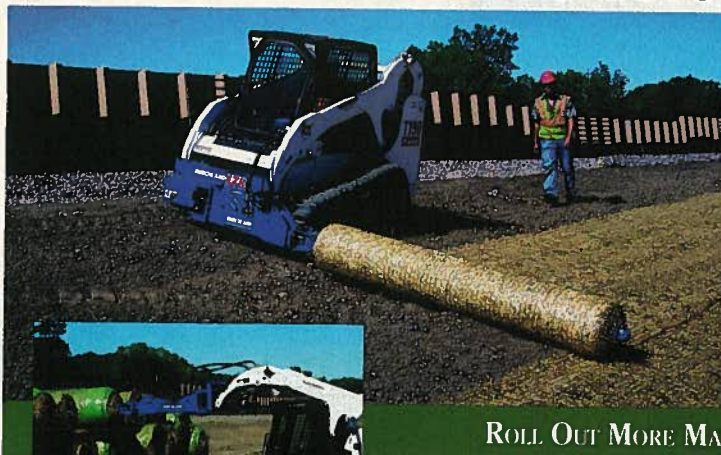

With a
BURCHLANDTM
EZR
MATERIAL ROLLER

ROLL OUT MORE MATERIAL FASTER EVERYDAY THE EZR WAY!

Highway medians and shoulders... residential and industrial developments... landfill caps and more will get done faster with significantly less labor costs using the Burchland EZR Material Roller. EZR's

precise engineering, ease of use and smooth performance can cut crew requirements and physical exertion while speeding up the entire process of material installation. Check out the EZR way to extra profits for yourself at Burchlandmfg.com or call us at 641-498-2063



FREE DEMO CD

EZR easily off-loads rolls. Stem angles up/down & swings 180° left or right.

Waterways Management Systems since 1967

**Aquatic Plant & Weed Harvesters (4' to 11' cutting swath)
Crane Boats (rake, clamshell, bucket, grapple attachment options)
Debris Skimmers (3 models for all floating debris applications)
Shore Conveyors, Trailers & Trailer-Conveyors**

**Certified
Jones Act
Compliant**

**Parts for
all harvester
makes & models**

**New & Used
Equipment**



Full or Partial Stainless Steel Construction our Specialty

Mid- & Western USA

Aquamarine Wisconsin

262-547-0211 Fax: 262-367-8064
phil@weedharvesters.com

Eastern USA

Aquamarine New York

315-253-4270 Fax: 315-253-9277
enlhy@weedharvesters.com

For More Information, Circle #10

- Environmental Engineering
- Facilities Engineering
- Civil Engineering
- Transportation Engineering
- Operations and Maintenance
- Applied Technologies

Baker

For more information, please visit us at www.mbakercorp.com or call 888.858.7042

soaring price for fuel.

"Five times the amount of HDPE pipe – around 360 feet – can be shipped at just about one-eighth the weight of fewer – 64 feet – RCP pipe sections," PPI's Radoszewski explained. "And that weight differential means a great deal in transportation costs."

"An eight-foot length of 48-inch RCP pipe weighs more than 9,000 pounds, while a single 20-foot length of 48 inch diameter HDPE pipe weighs just more than 600 pounds. That means that the same 20-foot run, which would have to be made from nearly three sections of RCP pipe, would weigh some 22,500 pounds."

"You can see with diesel hitting all time highs, small permitted loads and truck efficiency of 5-7 miles a gallon, the cost to deliver the more than 6,000 feet of concrete pipe for this detention system would be astronomical." **L&W**

For additional information, contact the Plastics Pipe Institute at (469)499-1044 or at www.plasticpipe.org.



MORE RESOURCES AVAILABLE ON LINE! WWW.LANDANDWATER.COM LOG ON & TUNE IN! WWW.CSCE-TV

Land and Water

THE MAGAZINE OF NATURAL RESOURCE MANAGEMENT AND RESTORATION

\$4.00

September/October 2008

Fighting for Caddo Lake

page 19

Plum Creek Wetlands Restoration

page 35