

N-12[®] Flex

The Flexibility Contractors Want.

The Flow Rates Farmers Need.



Industry's Best Flow Rates.

12%¹ better flow rates than the flexible dual-wall pipe industry average.

84%² better flow rates than single wall pipe.



More Flow. Less Pipe.

Increased flow capacity enables more flow from a smaller diameter pipe, when compared to single wall.



Simpler & Safer Installs.

Eliminates the need for open trenching, improving safety and installation speed.



Reduced Operating Costs.


Decreases the amount of material, labor and equipment needed, reducing overhead and operating costs.

Inside Diameter mm (in.)	Outside Diameter mm (in.)	Coil Length m (ft.)*	Solid	Regular Perf. (Drilled)	Fine Slot
200 (8)	241 (9.5)	280 (920)	•	•	•
250 (10)	305 (12)	167 (550)	•	n/a	•
300 (12)	361 (14.2)	110 (360)	•	•	•
375 (15)	450 (17.7)	50 (165)	•	•	•

¹Based on internal testing of six known suppliers of flexible dual wall pipe.

²Based on internal testing.

*Coil length applicable to U.S. production only.

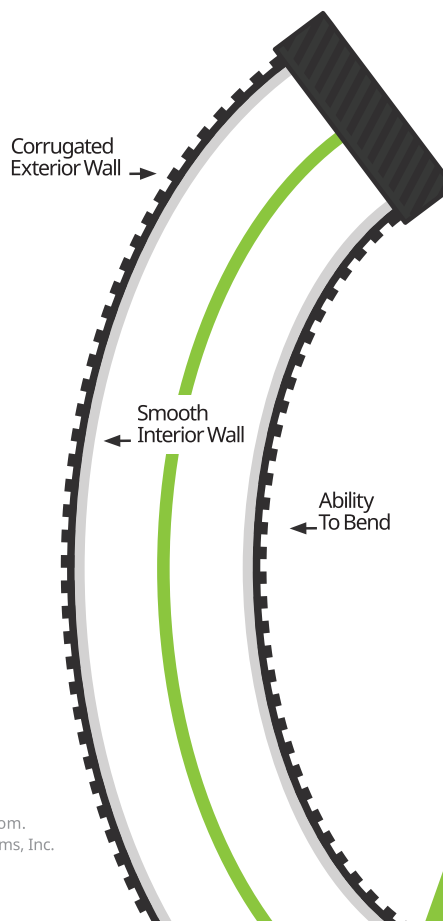

We keep business flowing.



ADS "Terms and Conditions of Sale" are available on the ADS website, www.adspipe.com.
 ADS[™], N-12[®] and the Green Stripe are registered trademarks of Advanced Drainage Systems, Inc.
 © 2024 Advanced Drainage Systems, Inc. #11082_C 08/24 MH

adspipe.ca
 800-821-6710