
BOOTED (CAST-IN) RESILIENT STRUCTURE CONNECTION 12" - 30" HDPE N-12 W/ CORRUGATED PIPE ADAPTER GASKET

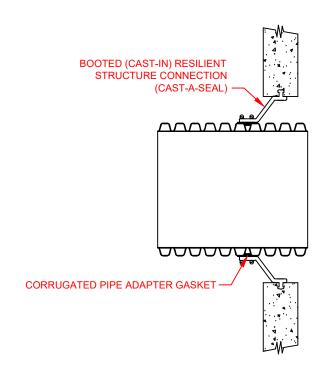

	PRESS SEAL® SYSTEMS				
PIPE SIZE	CORRUGATED PIPE ADAPTER GASKET	CAST-A-SEAL			
12" (300mm)	1250PS	CAS 802			
15" (375mm)	1550PS	CAS 802			
18" (450mm)	1850PS	CAS 802			
24" (600mm)	2450PS	CAS 802			
30" (750mm)	3050PS	CAS 802			

NOTES:

PERFORMANCE HIGHLY DEPENDENT ON INSTALLATION. CONTRACTOR MUST ENSURE MANHOLE GASKET IS UNIFORMLY SEATED AROUND STRUCTURE ADAPTER. EXTRA PRECAUTIONS MUST BE TAKEN TO PREVENT DIFFERENTIAL SETTLEMENT BETWEEN THE PIPE AND MANHOLE.

SEE STANDARD DETAIL STD-201 AND TECHNICAL NOTE: 5.04 HDPE CONNECTIONS TO MANHOLES AND STRUCTURES FOR INSTALLATION RECOMMENDATIONS.

REV.	DESCRIPTION	BY	MM/DD/YY	CHK'D		
5	UPDATED DETAIL AND TABLE	AMT	09-09-19			

* THIRD PARTY - CODES AS SUPPLIED BY MANUFACTURER CAST-A-SEAL is a registered trademark of PRESS-SEAL GASKET CORPORATION. (www.press-seal.com) © 2019 ADS, INC,

ADVANCED DRAINAGE SYSTEMS, INC. ("ADS") HAS PREPARED THIS DETAIL BASED ON INFORMATION PROVIDED TO ADS. THIS DRAWING IS INTENDED TO DEPICT THE COMPONENTS AS REQUESTED. ADS HAS NOT PERFORMED ANY ENGINEERING OR DESIGN SERVICES FOR THIS PROJECT, NOR HAS ADS INDEPENDENTLY VERIFIED THE INFORMATION SUPPLIED. THE INSTALLATION DETAILS PROVIDED HEREIN ARE GENERAL RECOMMENDATIONS AND ARE NOT SPECIFIC FOR THIS PROJECT. THE DESIGN ENGINEER SHALL REVIEW THESE DETAILS PRIOR TO CONSTRUCTION. IT IS THE DESIGN ENGINEERS RESPONSIBILITY TO ENSURE THE DETAILS PROVIDED HEREIN MEETS OR EXCEEDS THE APPLICABLE NATIONAL, STATE, OR LOCAL REQUIREMENTS AND TO ENSURE THAT THE DETAILS PROVIDED HEREIN ARE ACCEPTABLE FOR THIS PROJECT.

12"-30" HDPE N-12 BOOTED (CAST-IN) STRUCTURE CONNECTION WITH CORR PIPE ADAPTER GASKET

DRAWING NUMBER: STD-204F



DRAINN SY) CKS

DATE: 10/10/06

CK'D SY)

SCALE: NTS

SHEET 1 OF 1