


StormTech® SC-800 Chamber

Designed to meet the most stringent industry performance standards for superior structural integrity while providing designers with a cost-effective method to save valuable land and protect water resources. The StormTech system is designed primarily to be used under parking lots, thus maximizing land usage for private (commercial) and public applications. StormTech chambers can also be used in conjunction with Green Infrastructure, thus enhancing the performance and extending the service life of these practices.

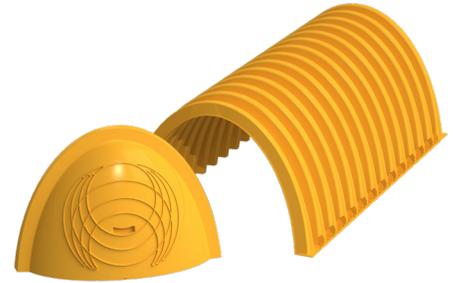

Nominal Chamber Specifications

(not to scale)

Size (L x W x H)
 85.4" x 51" x 33"
 2169 mm x 1295 mm x 838 mm



Chamber Storage
 50.6 ft³ (1.43 m³)

Min. Installed Storage*
 78.4 ft³ (2.22 m³)

Weight
 81.8 lbs (37.1 kg)

Shipping
 30 chambers/pallet
 60 end caps/pallet
 12 pallets/truck

*Assumes 6" (150 mm) stone above and below chambers, 3" (75 mm) stone between chambers, and 40% stone porosity.

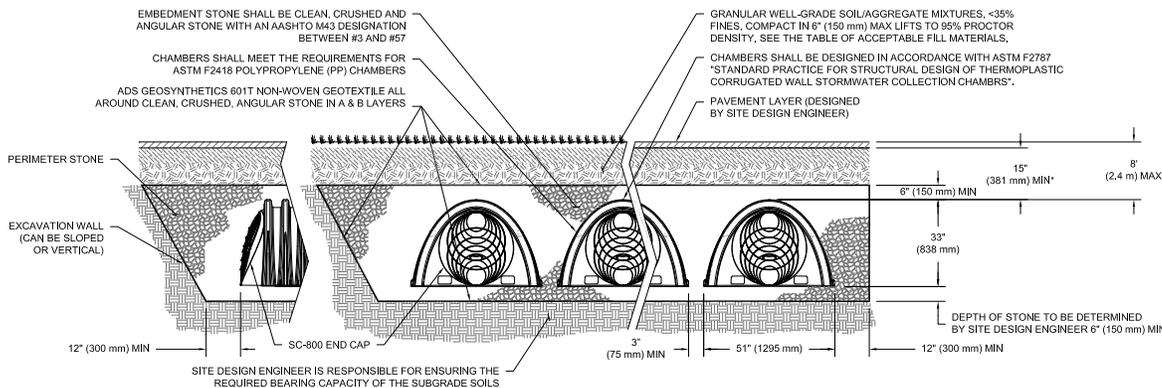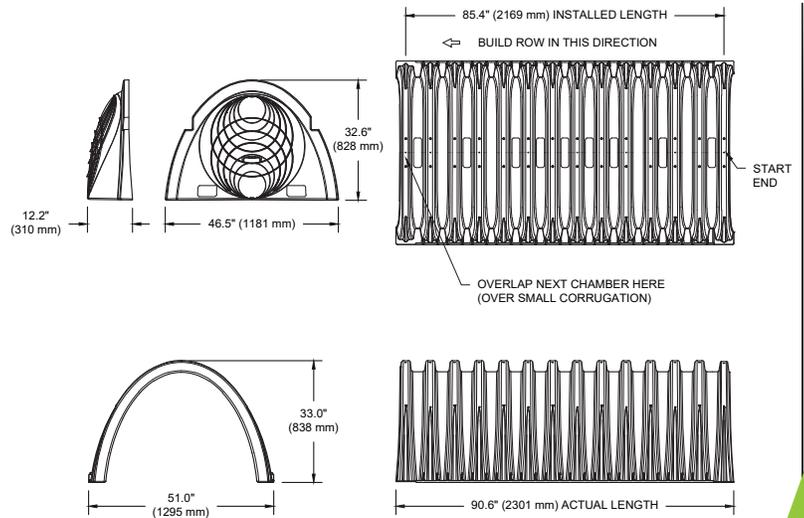

StormTech SC-800 Specifications

Cumulative Storage Volumes Per Chamber

Assumes 40% Stone Porosity. Calculations are Based Upon a 6" (150 mm) Stone Base Under Chambers.

Depth of Water in System Inches (mm)	Cumulative Chamber Storage ft ³ (m ³)	Total System Cumulative Storage ft ³ (m ³)
45 (1143)	↑ 50.62 (1.433)	78.41 (2.22)
44 (1118)	50.62 (1.433)	77.34 (2.19)
43 (1092)	50.62 (1.433)	76.28 (2.16)
42 (1067)	Stone Cover ↓ 50.62 (1.433)	75.21 (2.13)
41 (1041)	50.62 (1.433)	74.14 (2.10)
40 (1016)	50.62 (1.433)	73.07 (2.07)
39 (991)	50.62 (1.433)	72.01 (2.04)
38 (965)	50.55 (1.431)	70.89 (2.01)
37 (940)	50.35 (1.426)	69.71 (1.97)
36 (914)	50.07 (1.418)	68.47 (1.94)
35 (889)	49.56 (1.403)	67.10 (1.90)
34 (864)	48.82 (1.382)	65.59 (1.86)
33 (838)	47.93 (1.357)	63.98 (1.81)
32 (813)	46.91 (1.328)	62.31 (1.76)
31 (787)	45.79 (1.297)	60.57 (1.72)
30 (762)	44.58 (1.262)	58.77 (1.66)
29 (737)	43.28 (1.226)	56.93 (1.61)
28 (711)	41.91 (1.187)	55.04 (1.56)
27 (686)	40.47 (1.146)	53.10 (1.50)
26 (660)	38.96 (1.103)	51.13 (1.45)
25 (635)	37.40 (1.059)	49.13 (1.39)
24 (610)	35.78 (1.013)	47.09 (1.33)
23 (584)	34.10 (0.966)	45.02 (1.27)
22 (559)	32.38 (0.917)	42.91 (1.22)
21 (533)	30.61 (0.867)	40.79 (1.15)
20 (508)	28.80 (0.816)	38.63 (1.09)
19 (483)	26.95 (0.763)	36.45 (1.03)
18 (457)	25.06 (0.710)	34.25 (0.97)
17 (432)	23.13 (0.655)	32.02 (0.91)
16 (406)	21.17 (0.599)	29.78 (0.84)
15 (381)	19.17 (0.543)	27.51 (0.78)
14 (356)	17.14 (0.485)	25.23 (0.71)
13 (330)	15.09 (0.427)	22.93 (0.65)
12 (305)	13.00 (0.368)	20.61 (0.58)
11 (279)	10.89 (0.308)	18.28 (0.52)
10 (254)	8.76 (0.248)	15.93 (0.45)
9 (229)	6.60 (0.187)	13.57 (0.38)
8 (203)	4.42 (0.125)	11.19 (0.32)
7 (178)	2.22 (0.063)	8.81 (0.25)
6 (152)	↑ 0 (0)	6.41 (0.18)
5 (127)	0 (0)	5.34 (0.15)
4 (102)	Stone Foundation ↓ 0 (0)	4.27 (0.12)
3 (76)	0 (0)	3.20 (0.09)
2 (51)	0 (0)	2.14 (0.06)
1 (25)	0 (0)	1.07 (0.03)

Note: Add 1.07 ft³ (0.03 m³) of storage for each additional inch (25 mm) of stone foundation.

ADS StormTech products, manufactured in accordance with ASTM F2418 or ASTM F2922, comply with all requirements in the Build America, Buy America (BABA) Act.

Working on a project?

Visit us at adspipe.com/stormtech and utilize the Design Tool



Storage Volume Per Chamber ft³ (m³)

	Bare Chamber Storage ft ³ (m ³)	Chamber and Stone Foundation Depth in. (mm)		
		6 (150)	12 (300)	18 (450)
SC-800 Chamber	50.6 (1.43)	78.4 (2.22)	84.8 (2.4)	91.2 (2.58)

Note: Assumes 6" (150 mm) stone above chambers, 3" (75 mm) row spacing and 40% stone porosity.

Amount of Stone Per Chamber

English Tons (yds ³)	Stone Foundation Depth		
	6"	12"	18"
SC-800	3.6 (2.6)	4.4 (3.2)	5.3 (3.8)
Metric Kilograms (m ³)	150 mm	300 mm	450 mm
SC-800	3270 (2.0)	3990 (2.4)	4810 (2.9)

Note: Assumes 6" (150 mm) of stone above chambers and 3" (75 mm) stone between chambers.

Volume Excavation Per Chamber yd³ (m³)

	Stone Foundation Depth		
	6" (150 mm)	12" (300 mm)	18" (450 mm)
SC-800	5.3 (4.1)	5.9 (4.5)	6.5 (5.0)

Note: Assumes 3" (75 mm) of row separation and 15" (375 mm) of cover. The volume of excavation will vary as depth of cover increases.