
BOOTED (CORED OR CAST HOLE) RESILIENT STRUCTURE CONNECTION 12"- 30" HDPE N-12 W/ NYLOPLAST PVC MH ADAPTER

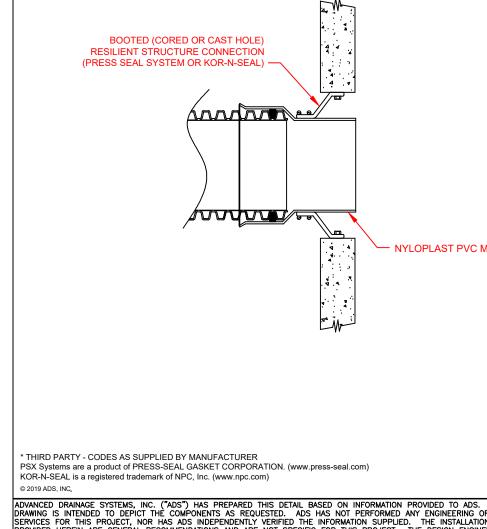

			PRESS SEAL [®] SYSTEMS *	TRELLEBORG		
	PIPE SIZE	NYLOPLAST PVC	PSX: DIRECT DRIVE	KOR-N-SEAL [®] *		
		ADAPTER		SERIES I OR II	SERIES 306	
	12" (300mm)	1277AG	16M	S106-16AWP	N/A	
	15" (375mm)	1577AG	18M OR 20Y	S106-20BWS	N/A	
	18" (450mm)	1877AG	22M	S206-24A	S306-22	
	24" (600mm)	2477AG	28A	S206-28	S306-28	
	30" (750mm)	3077AG	36A	S206-36	S306-36	

NYLOPLAST PVC MH ADAPTER

NOTES:

PERFORMANCE HIGHLY DEPENDENT ON INSTALLATION. CONTRACTOR MUST ENSURE MANHOLE GASKET IS UNIFORMLY SEATED AROUND STRUCTURE ADAPTER. EXTRA PRECAUTIONS MUST BE TAKEN TO PREVENT DIFFERENTIAL SETTLEMENT BETWEEN THE PIPE AND MANHOLE.

SEE STANDARD DETAIL STD-201 AND TECHNICAL NOTE: 5.04 HDPE CONNECTIONS TO MANHOLES AND STRUCTURES FOR INSTALLATION RECOMMENDATIONS.

NYLOPLAST PVC ADAPTER OD EQUIVALENT TO SDR 35

6	UPDATED DETAIL AND TABLE	AMT	09-09-19		
REV.	DESCRIPTION	BY	MM/DD/YY	CHK'D	
					CKS

ADVANCED DRAINAGE SYSTEMS, INC. ("ADS") HAS PREPARED THIS DETAIL BASED ON INFORMATION PROVIDED TO ADS. THIS DRAWING IS INTENDED TO DEPICT THE COMPONENTS AS REQUESTED. ADS HAS NOT PERFORMED ANY ENGINEERING OR DESIGN SERVICES FOR THIS PROJECT, NOR HAS ADS INDEPENDENTLY VERIFIED THE INFORMATION SUPPLIED. THE INSTALLATION DETAILS PROVIDED HEREIN ARE GENERAL RECOMMENDATIONS AND ARE NOT SPECIFIC FOR THIS PROJECT. THE DESIGN ENGINEER SHALL REVIEW THESE DETAILS PRIOR TO CONSTRUCTION. IT IS THE DESIGN ENGINEERS RESPONSIBILITY TO ENSURE THE DETAILS PROVIDED HEREIN MEETS OR EXCEEDS THE APPLICABLE NATIONAL, STATE, OR LOCAL REQUIREMENTS AND TO ENSURE THAT THE DETAILS PROVIDED HEREIN ARE ACCEPTABLE FOR THIS PROJECT.

					DRAWN B	CKS
12"-30" HDPE N-12 BOOTED (CORED OR CAST HOLE) STRUCTURE CONNECTION W/ PVC ADAPTER			4640 TRUEMAN BLVD HILLIARD, OHIO 43026		10/10/06	
				orta em		
			Advanced Drainage Systems, Inc.		SCALE	NTS
	DRAWING NUMBER:	STD-204G	Advanced Drainage Systems, Inc.		SHEET	1 OF 1