
## Inserta Tee<sup>®</sup> Wall Thickness Chart for ADS Pipe

Inserta Tee OneFit and Multifit products should be utilized for most storm applications. Custom Inserta Tee Products are available for sanitary applications and some storm applications. Custom fittings are made to fit the wall thickness and radius of the mainline pipe. Wall thickness information of non-ADS pipe products can be found from the pipe manufacturer. Reference the Inserta Tee protrusion chart for protrusion information (see STD-1101). Inserta Tee should be installed with Inserta Tee hole saw (see detail STD-1102).



ADVANCED DRAINAGE SYSTEMS, INC. ("ADS") HAS PREPARED THIS DETAIL BASED ON INFORMATION PROVIDED TO ADS. THIS DRAWING IS INTENDED TO DEPICT THE COMPONENTS AS REQUESTED. ADS HAS NOT PERFORMED ANY ENGINEERING OR DESIGN SERVICES FOR THIS PROJECT, NOR HAS ADS INDEPENDENTLY VERIFIED THE INFORMATION SUPPLIED. THE INSTALLATION DETAILS PROVIDED HEREIN ARE GENERAL RECOMMENDATIONS AND ARE NOT SPECIFIC FOR THIS PROJECT. THE DESIGN ENGINEER SHALL REVIEW THESE DETAILS PROVIDED HEREIN ARE GENERAL RECOMMENDATIONS AND ENGINEERS RESPONSIBILITY TO ENSURE THE DETAILS PROVIDED HEREIN MEETS OR EXCEEDS THE APPLICABLE NATIONAL, STATE, OR LOCAL REQUIREMENTS AND TO ENSURE THAT THE DETAILS PROVIDED HEREIN ARE ACCEPTABLE FOR THIS PROJECT. DRAWING NUMBER STD-1103

: <b>e</b>	N12	SW HDPE	HP Storm	HP Sanitite
V	0.35	0.35	-	-
l	0.45	0.45	-	-
	0.60	0.60	-	_
11	0.75	0.75	-	-
11	1.10	1.15	1.20	1.15
	1.30	1.30	1.30	1.30
11	1.55	1.55	1.55	1.60
	1.80	-	-	-
	2.05	1.80	1.95	1.95
	2.45	_	2.65	2.60
	2.55	-	2.75	2.65
) <b>TT</b>	3.05	_	2.70	2.70
)	3.50	-	3.10	3.25
	3.50	_	-	-
••	3.45	-	3.60	3.55

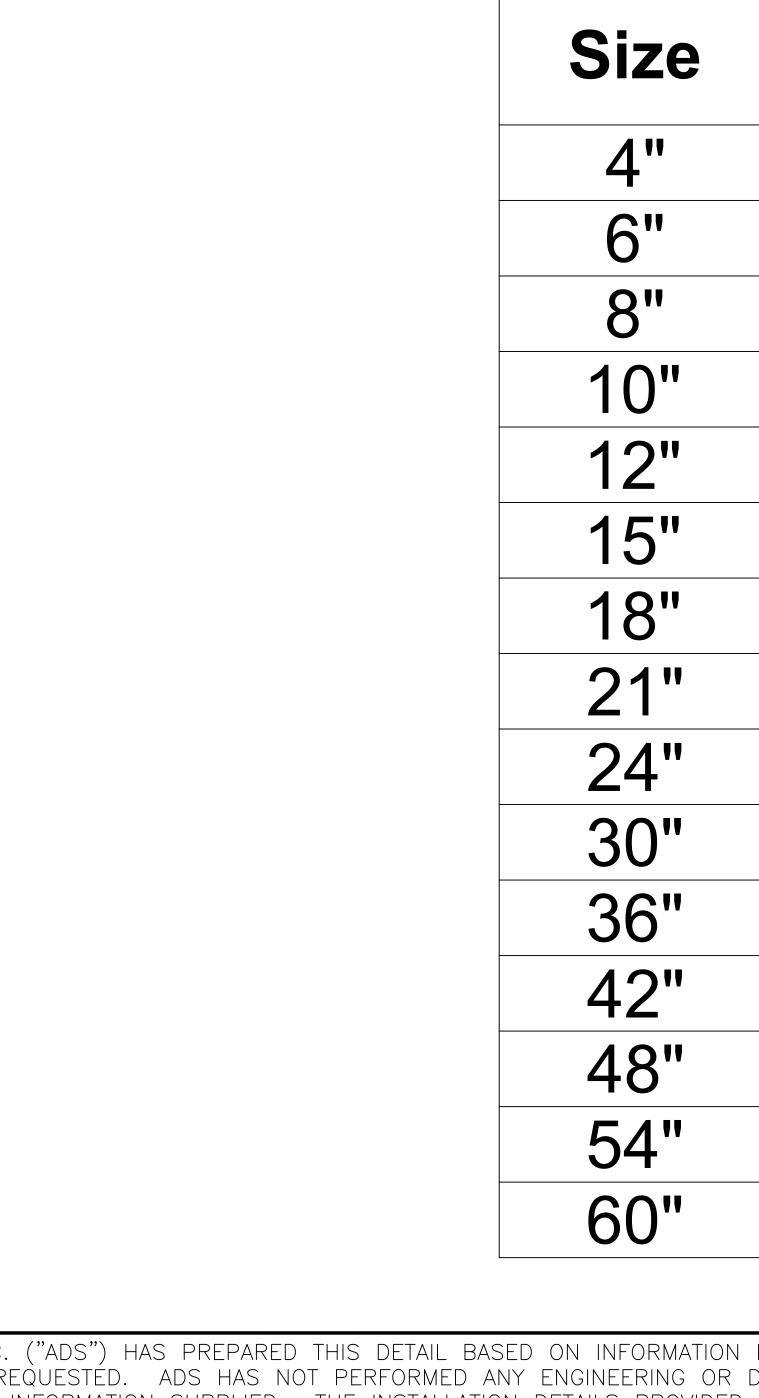