

# Saddle Gasket

Advanced Drainage Systems introduces a new saddle gasket that will save on installation time. The gasket fits pipe diameters 12"-36" (300-900 mm) and is used for dual wall N-12® (HDPE) and HP Storm (PP). The gasket and pipe can then be installed into the bells of Nyloplast basins or fittings.

## Features & Benefits


- Gaskets fits dual wall N-12 (HDPE) and HP Storm (PP) pipe
- Pry hole technology for 24"-36" (600-900 mm) is ADS exclusive
- Watertight performance per ASTM D3212
- Product simplification
- Audible "snap" to know when saddle gasket has been installed properly onto pipe
- Manufactured in the U.S.A.

## Significant Installation Time Savings

| Diameter in (mm) | Valley Gasket Install Time (People Needed) | Saddle Gasket Install Time (People Needed) |
|------------------|--------------------------------------------|--------------------------------------------|
| 12-18 (300-450)  | 5-10 minutes (1)                           | <5 minutes (1)                             |
| 24-30 (600-750)  | 20+ minutes (2)                            | <5 minutes (1)                             |
| 36 (900)         | 30+ minutes (2+)                           | <5 minutes (1)                             |

## Gasket Comparison

| Size in (mm) | New Gasket Code | Old Gasket Code |
|--------------|-----------------|-----------------|
| 12 (300)     | 1258AG          | 1259AG          |
| 15 (375)     | 1558AG          | 1559AG          |
| 18 (450)     | 1858AG          | 1859AG          |
|              |                 | 1859AGL         |
| 24 (600)     | 2458AG          | 2459AG          |
|              |                 | 2459AGL         |
|              |                 | 2459AGLHP       |
|              |                 | 2459AGLMH       |
| 30 (750)     | 3058AG          | 3063MG          |
| 36 (900)     | 3658AG          | 3660MG          |
|              |                 | 3665MG          |

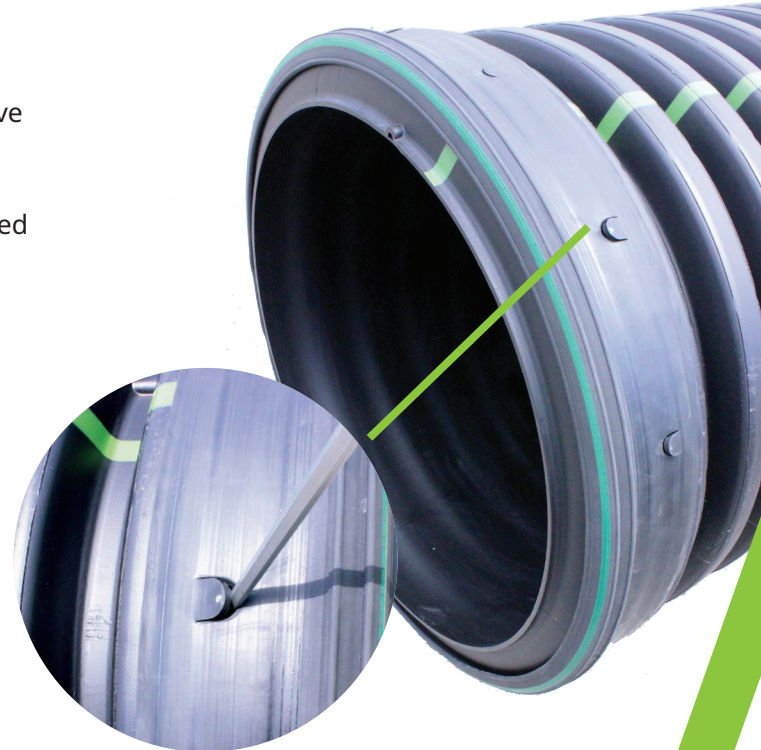

Scan QR code to view 24"-36" install video.

