

# Saddle Gasket

Advanced Drainage Systems introduces a new saddle gasket that will save on installation time. The gasket fits pipe diameters 12"-36" (300-900 mm) and is used for dual wall N-12® (HDPE) and HP Storm (PP). The gasket and pipe can then be installed into the bells of Nyloplast® basins or fittings.

## Features & Benefits


- Gaskets fits dual wall N-12 (HDPE) and HP Storm (PP) pipe
- Pry hole technology for 24"-36" (600-900 mm) is ADS exclusive
- Watertight performance per ASTM D3212
- Product simplification
- Audible "snap" to know when saddle gasket has been installed properly onto pipe
- Manufactured in the U.S.A.

## Significant Installation Time Savings

Diameter in (mm)	Valley Gasket Install Time (People Needed)	Saddle Gasket Install Time (People Needed)
12-18 (300-450)	5-10 minutes (1)	<5 minutes (1)
24-30 (600-750)	20+ minutes (2)	<5 minutes (1)
36 (900)	30+ minutes (2+)	<5 minutes (1)

## Gasket Comparison

Size in (mm)	New Gasket Code	Old Gasket Code
12 (300)	1258AG	1259AG
15 (375)	1558AG	1559AG
18 (450)	1858AG	1859AG
		1859AGL
24 (600)	2458AG 2458AGL 2458AGHPEP	2459AG
		2459AGL
		2459AGLHP
		2459AGLMH
30 (750)	3058AG	3063MG
36 (900)	3658AG	3660MG
		3665MG

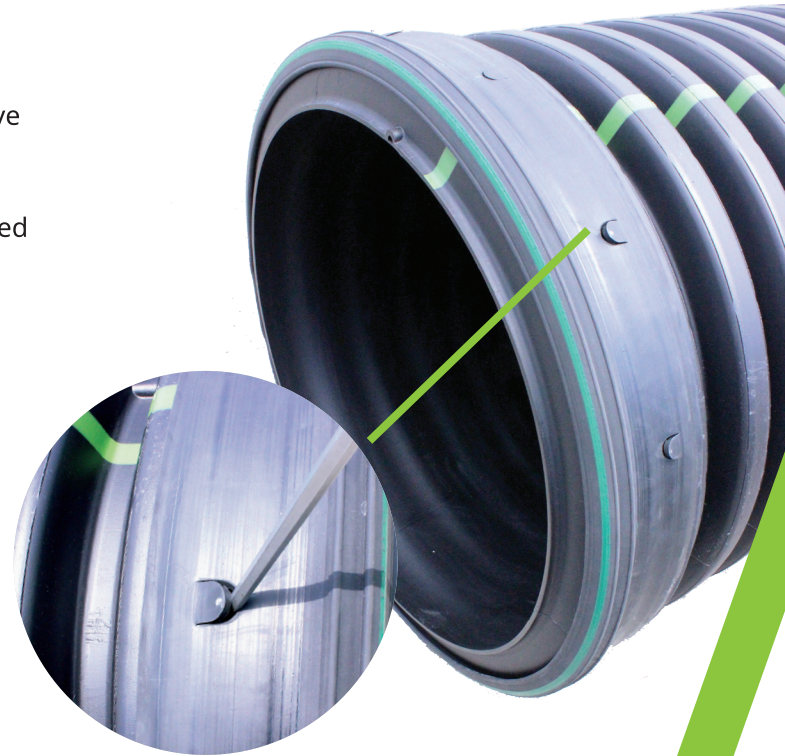

Pictured above is a 24"-36" (600-900 mm) saddle gasket.



Scan QR code to view 24"-36" (600-900 mm) install video.

