



ADS FLEXSTORM PURE FULL TRASH CAPTURE INLET FILTERS

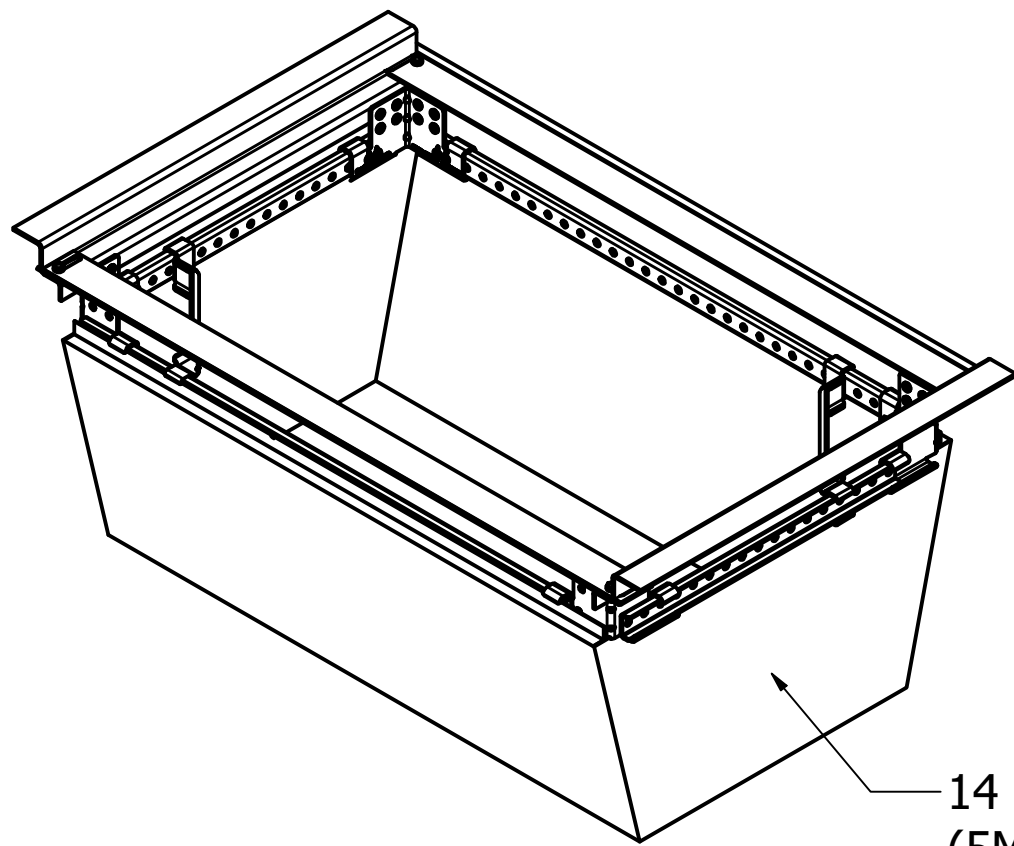


SQUARE/RECTANGULAR INLET FILTER				
Clear Opening Size	Style P/N	Min. Bypass Flow Rate (CFS)	Min. Empty Treated Flow (CFS)	Min. Storage Capacity (Cu.Ft.)
Small: Up to 64" Perimeter	62SHDFTC	1.6	6.8	0.7
Medium: 65" - 96" Perimeter	62MHDFTC	2.7	12.2	1.7
Large: 97" - 120" Perimeter	62LHDFTC	3.8	18.6	3.1
Extra-Large: 121" or Greater Perimeter	62XLHDFTC	7.2	25.1	5.0

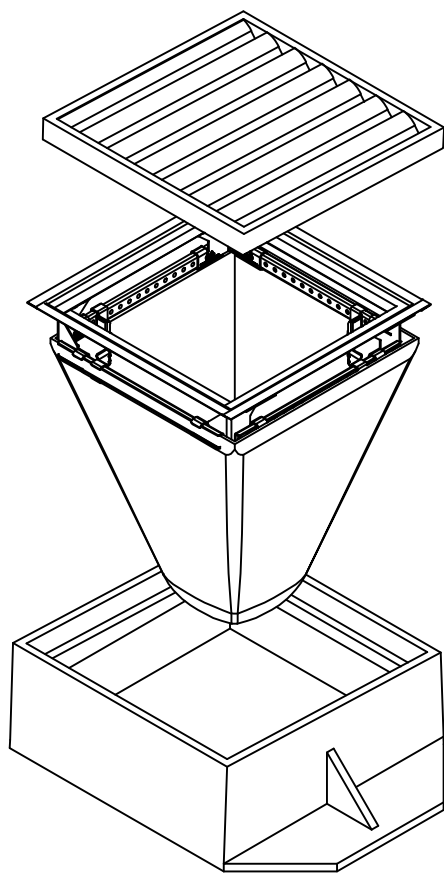

INSTALLATION INSTRUCTIONS:


1. REMOVE GRATE
2. CLEAN GRATE LEDGE
3. SET INLET FILTER ON LOAD BEARING LEDGE OF STRUCTURE
4. REPLACE GRATE

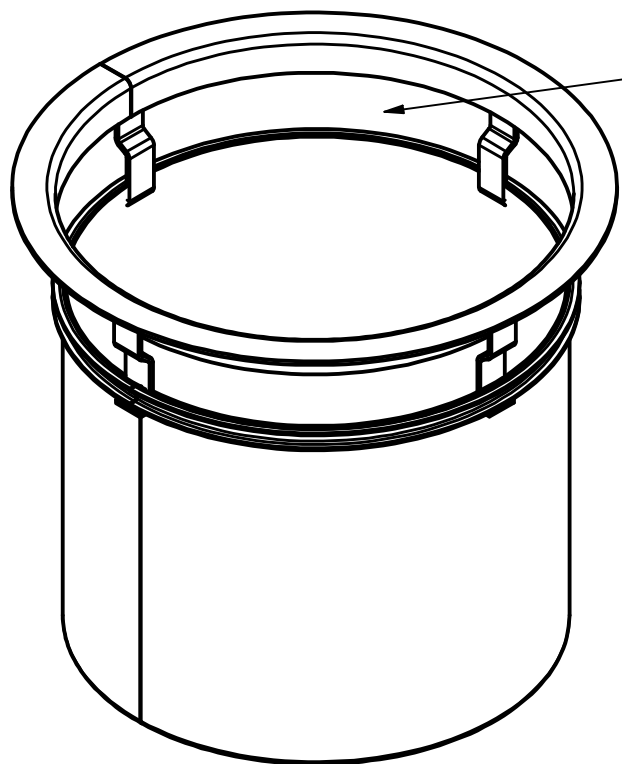

ROUND INLET FILTER				
Clear Opening Size	Style P/N	Min. Bypass Flow Rate (CFS)	Min. Empty Treated Flow (CFS)	Min. Storage Capacity (Cu.Ft.)
Small: 10" - 16" Dia.	62SHDRFTC	1.6	4.9	0.5
Medium: 17" - 24" Dia.	62MHDRFTC	2.7	9.4	1.3
Large: 25" - 36" Dia.	62LHDRFTC	3.8	16.2	2.7

NOTES:

1. ALL FRAMING IS CONSTRUCTED OF 304 STAINLESS STEEL.
2. TOTAL BYPASS CAPACITY WILL VARY WITH EACH SIZE DRAINAGE STRUCTURE. ADS DESIGNS FRAMING BYPASS TO MEET OR EXCEED THE DESIGN FLOW OF THE PARTICULAR DRAINAGE STRUCTURE.
3. UPON ORDERING, CONFIRMATION OF THE INLET SPECIFICATION, PRECAST/FOUNDRY CASTING MAKE AND MODEL, OR DETAILED DIMENSIONAL FORMS MUST BE PROVIDED TO CONFIGURE AND ASSEMBLE AN INLET FILTER.
4. ALL FILTERS MEET ASTM D8057 SPECIFICATIONS.
5. FOR WRITTEN SPECIFICATIONS AND MAINTENANCE GUIDELINES VISIT WWW.ADPIPE.COM.

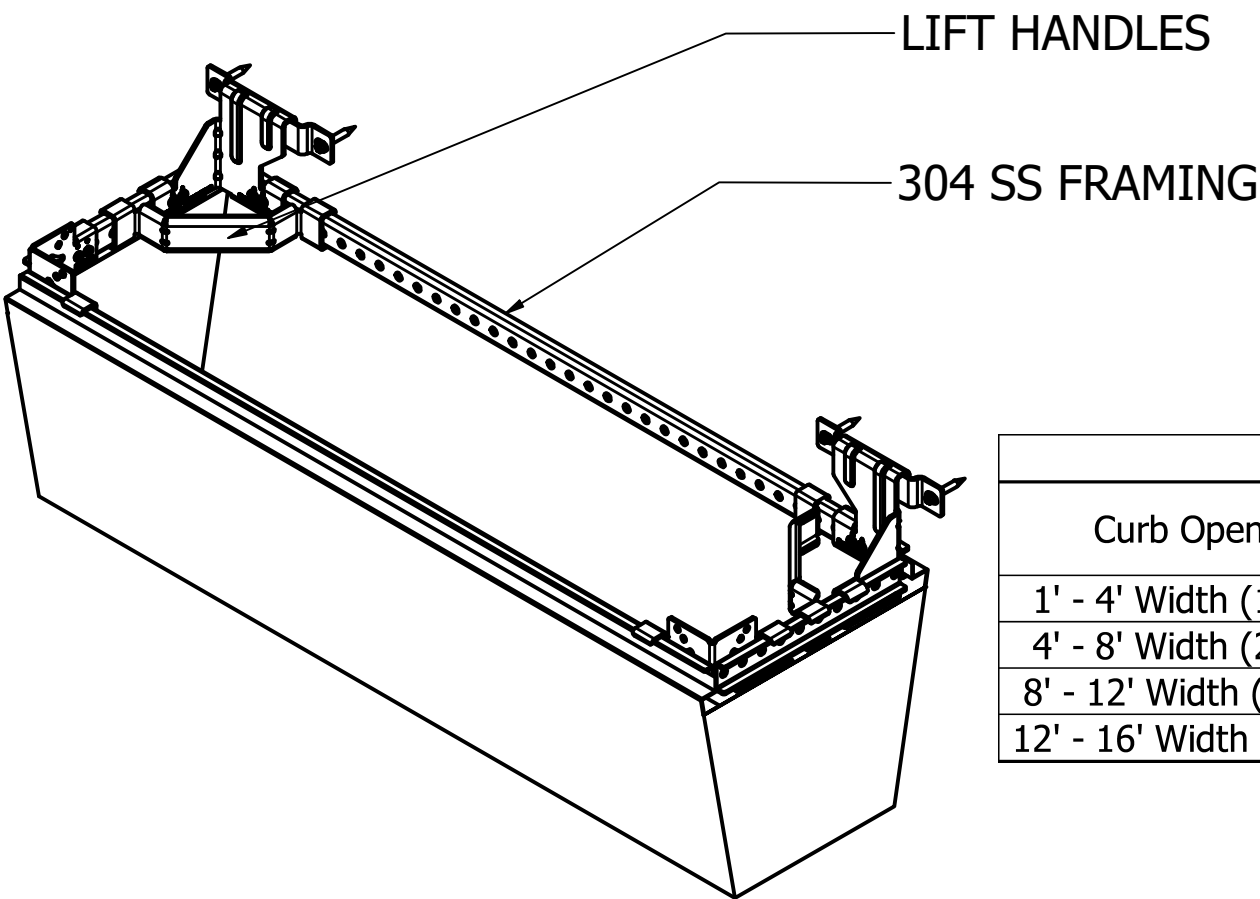

CURB OPEN THROAT INLET FILTER			
Curb Opening Size	Style P/N	Min. Empty Treated Flow (CFS)	Min. Storage Capacity (Cu.Ft.)
1' - 4' Width (1-Piece Set)	62HDWM1FTC	5.7	0.9
4' - 8' Width (2-Piece Set)	62HDWM2FTC	22.8	3.6
8' - 12' Width (3-Piece Set)	62HDWM3FTC	45.6	7.2
12' - 16' Width (4-Piece Set)	62HDWM4FTC	68.4	10.8

ALL PRODUCTS MANUFACTURED
BY ADVANCED DRAINAGE SYSTEMS
WWW.ADPIPE.COM
PH. 1-800-821-6710



SIZE	DATE	DWG NO	REV
C	02/06/2023	ADS FLEXSTORM PURE (FTC)	A
SCALE	N/A	SHEET 1 OF 1	