
## COMPRESSION (CAST-IN) RESILIENT STRUCTURE CONNECTION 12"-30" HDPE N-12 W/ NYLOPLAST PVC MH ADAPTER

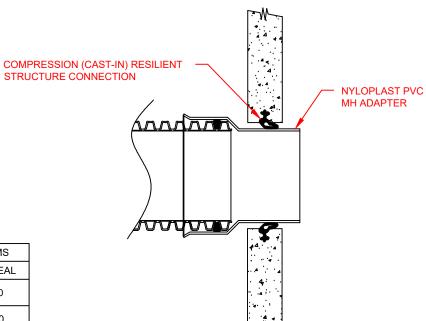

PIPE SIZE	ADS PRODUCT CODES	A-LOK® *	PRESS SEAL® SYSTEMS	
			ECONOSEAL	KWIK SEAL
12" (300mm)	1277AGU	410	1250	KS750
15 (375mm)	1577AGU	490	1530	KS750
18" (450mm)	1877AGU	610	18701.4850	KS800
24" (600mm)	2477AGU	800	24803.48500	KS800
30" (750mm)	3077AGU	1040	32000.48500	N/A

## NOTES:

5

REV.

PERFORMANCE HIGHLY DEPENDENT ON INSTALLATION. CONTRACTOR MUST ENSURE MANHOLE GASKET IS UNIFORMLY SEATED AROUND STRUCTURE ADAPTER. EXTRA PRECAUTIONS MUST BE TAKEN TO PREVENT DIFFERENTIAL SETTLEMENT BETWEEN THE PIPE AND MANHOLE.

SEE STANDARD DETAIL STD-201 AND TECHNICAL NOTE: 5.04 HDPE CONNECTIONS TO MANHOLES AND STRUCTURES FOR INSTALLATION RECOMMENDATIONS.

NYLOPLAST PVC ADAPTER OD EQUIVALENT TO SDR 35

UPDATED DETAIL AND TABLE

DESCRIPTION

\* THIRD PARTY - CODES AS SUPPLIED BY MANUFACTURER A-LOK is a registered trademark of A-LOK Products, Inc. (www.a-lok.com)

ADVANCED DRAINAGE SYSTEMS, INC. ("ADS") HAS PREPARED THIS DETAIL BASED ON INFORMATION PROVIDED TO ADS. THIS DRAWING IS INTENDED TO DEPICT THE COMPONENTS AS REQUESTED. ADS HAS NOT PERFORMED ANY ENGINEERING OR DESIGN SERVICES FOR THIS PROJECT, NOR HAS ADS INDEPENDENTLY VERIFIED THE INFORMATION SUPPLIED. THE INSTALLATION DETAILS PROVIDED HEREIN ARE GENERAL RECOMMENDATIONS AND ARE NOT SPECIFIC FOR THIS PROJECT. THE DESIGN ENGINEER SHALL REVIEW THESE DETAILS PRIOR TO CONSTRUCTION. IT IS THE DESIGN ENGINEERS RESPONSIBILITY TO ENSURE THE DETAILS PROVIDED HEREIN MEETS OR EXCEEDS THE APPLICABLE NATIONAL, STATE, OR LOCAL REQUIREMENTS AND TO ENSURE THAT THE DETAILS PROVIDED HEREIN ARE ACCEPTABLE FOR THIS PROJECT.

12"-30" HDPE N-12 COMPRESSION (CAST-IN)
STRUCTURE CONNECTION WITH PVC ADAPTER

Advanced Drainage Systems, Inc.

AMT

BY

09-09-19

MM/DD/YY

4640 TRUEMAN BLVD HILLIARD, OHIO 43026

CHK'D

CKS 10/10/06 NTS

DRAWING NUMBER:

STD-204C

1 OF 1