


MudPik Maintenance Sheet

MUDPik mats should be inspected and maintained before each use in the field. Inspections should include.

- Verify the bolts attaching the knobs are snug. If any of the bolts are loose, they should be tightened until the knob is snug to the mat
- Verify the bolts attaching the connection plates are snug. Any loose bolts should be tightened until they are snug to the connection plate.
- Check sediment build up between the knobs. If sediment is up to the first ridge on the knob, approximately 25.5 mm (1.5") above the mat, you should remove the sediment. See diagram below.

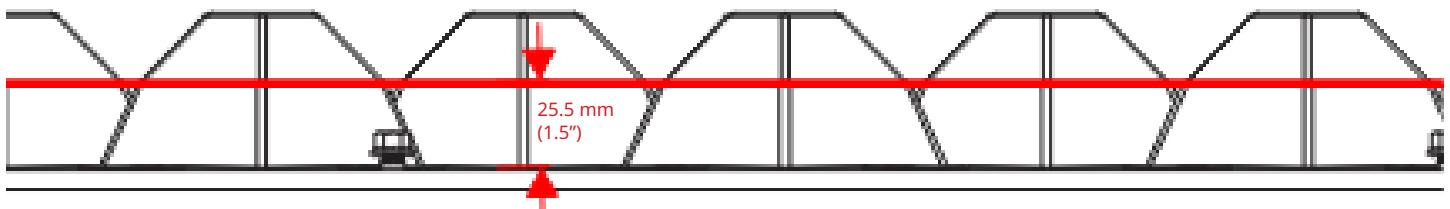

Cleaning and Maintenance

Cleaning methods vary depending on different soil types and available equipment. Options include but are not limited to.

- Skid-Steer Broom Attachment
- Street Sweeper or sidewalk sweeper
- Pressure Washer and Vac Truck to contain the water
- Shovel and Hand Broom

No Metal Tracked Equipment

