


BG-Filcoten® Channel Drain

BG-Filcoten is engineered from a fiber-reinforced High Performance Concrete (HPC) to make a superior trench drain, which is offered in neutral and pre-sloped segments in a variety of sizes. BG-Filcoten is suitable for handling high-load capacities from pedestrian traffic to railway stations, industrial warehouses and parking lots.

Tec 100


4" (100 mm) wide channel

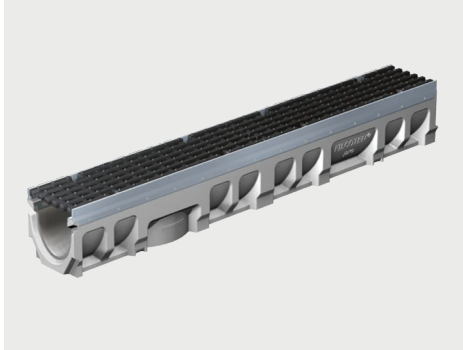

Channels - 20 pre-sloped @ 0.5% plus 4 neutrals - galvanized steel rail
Max flow rates - 152 gpm (0.3 cfs)
Inverts - 5.31"-9.65" (135-245 mm)

Pro V 200


8" (200 mm) wide channel

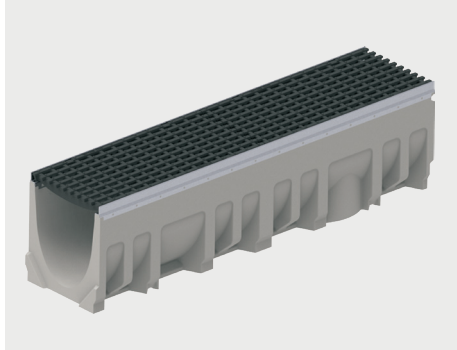

Channels - 4 neutrals - galvanized steel rail
Max flow rates - 678 gpm (1.5 cfs)
Inverts - 10.43"-14.37" (265-365 mm)

Pro V 300

12" (300 mm) wide channel

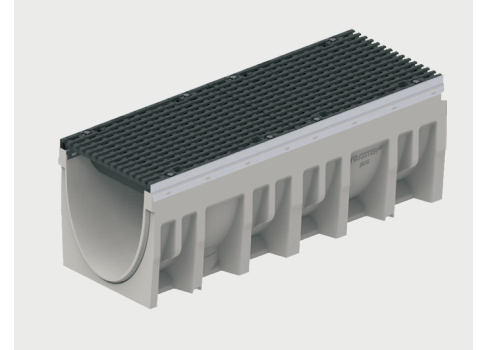

Channels - 4 neutrals - galvanized steel rail
Max flow rates - 1,349 gpm (3.0 cfs)
Inverts - 14.17"-18.11" (360-460 mm)


Features and Benefits

Heavy Duty




- Designed for heavy-duty industrial and commercial applications
- High-performance concrete body
- Galvanized steel rails
- Ductile iron grates (Class E)

Channel Options

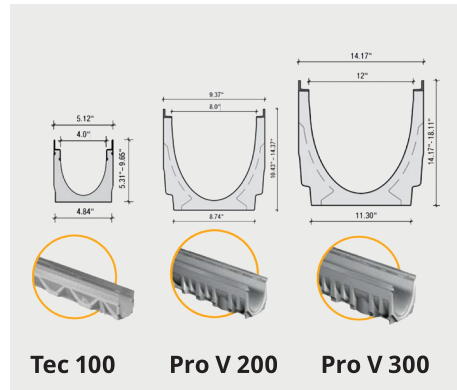

- Multiple sizes for various design requirements and standards
- 4" (100 mm) sloped channels up to 68' (20.7 m)
- 8" and 12" (200 and 300 mm) stepped neutrals

Modular Components

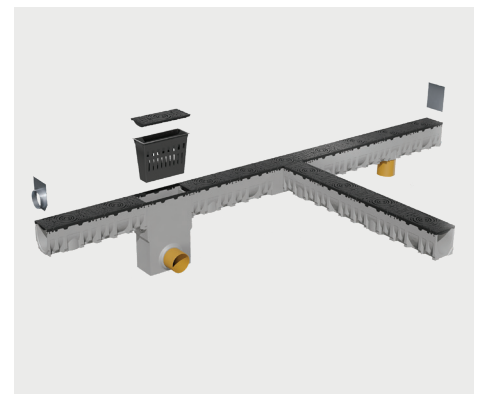

- Interchangeable components made to stock and ready to ship
- Fast lead times
- Standard layouts
- Configurable for any project need

Grates

Ductile iron slotted




- Load Class E (>HS-25)
- Better inlet capacity
- fiX compatible or 4 bolt
- Best for industrial, warehouse

Ductile iron longitudinal



- Load Class E (>HS-25)
- ADS and heel proof
- fiX compatible or 4 bolt
- Best for mixed use applications

"fiX" self-locking clips

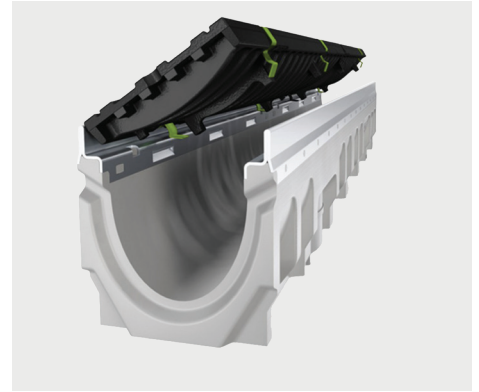

- Fast, easy and secure
- Self-locking mechanism
- Designed to lock grates with a snap

Filcoten Applications



Plaza and courtyards



Parking lots



Loading docks



Infrastructure



Please scan the QR code for more information on ADS and NDS products.



ADS and the Green Stripe are registered trademarks of Advanced Drainage Systems, Inc.
Dura Slope® is a registered trademark of National Diversified Sales, Inc.
© 2026 Advanced Drainage Systems, Inc. 11358 08-26 MH

adspipe.com