

Quick4Plus[®] Standard Low Profile (LP)

Chambers

The Quick4 Plus Standard Low Profile (LP) offers maximum strength through its four center structural columns. This chamber can be installed in a 36-inch-wide trench. It is shorter in height than Infiltrator's other Standard model chambers, allowing for shallower installation. Like the original line of Quick4 chambers, it offers advanced contouring capability with its Contour Swivel Connection™, which permits turns up to 15°, right or left. The Quick4 Plus All-in-One 8 and Quick4 Plus Endcaps provide increased flexibility in system design and configurations.



Quick4 Plus Standard Low Profile (LP) with All-in-one Endcap

Benefits

- Low profile design makes this chamber ideal for shallow applications
- Reduces imported fill needed for cap and fill systems
- Four center structural columns offer superior strength
- Advanced contouring connections
- Latching mechanism allows for quick installation
- Four-foot chamber lengths are easy to handle and install
- Supports wheel loads of 16,000 lbs/axle with 12" of cover

Quick4 Plus All-in-One 8 Endcap Benefits

- Mid-trench connection feature allows construction of chamber rows with center feed, as an alternative to inletting at the ends of chamber rows
- Center-feed connection allows for easy installation of serial distribution systems
- Pipe connection options include sides, ends or top

Quick4 Plus All-in-One Periscope


- Allows for raised invert installations
- 180° directional inletting
- Raised invert is ideal for serial applications




Quick4 Plus Standard Low Profile (LP) Chamber Specifications

Size	34"W x 53"L x 8"H (864 mm x 1346 mm x 203 mm)
Effective Length	48" (1219 mm)
Louver Height	6.3" (160 mm)
Storage Capacity	32 gal (121 L)
Invert Height	3.3" (84 mm), 9.6" (244 mm)


Quick4 Plus Standard Low Profile (LP) Chamber

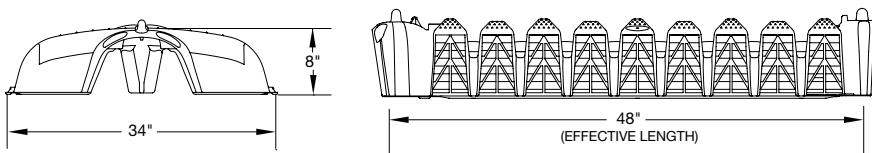

Quick4 Plus All-in-One 8 and Periscope

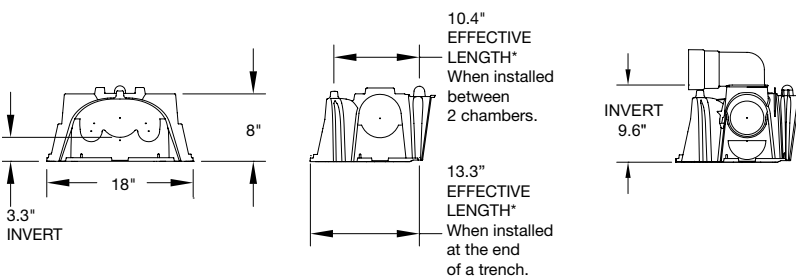

Quick4 Plus Endcap

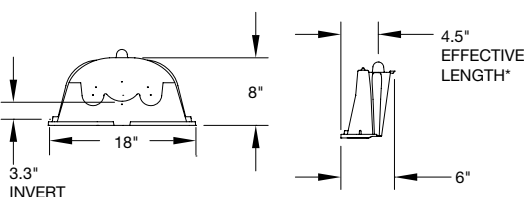

Contact Infiltrator's Technical Services Department for assistance at 1-800-221-4436 or info@infiltratorwater.com



Scan QR Code for Installation Instructions

