



10' Spee-D Channel with Galvanized Metal Grate

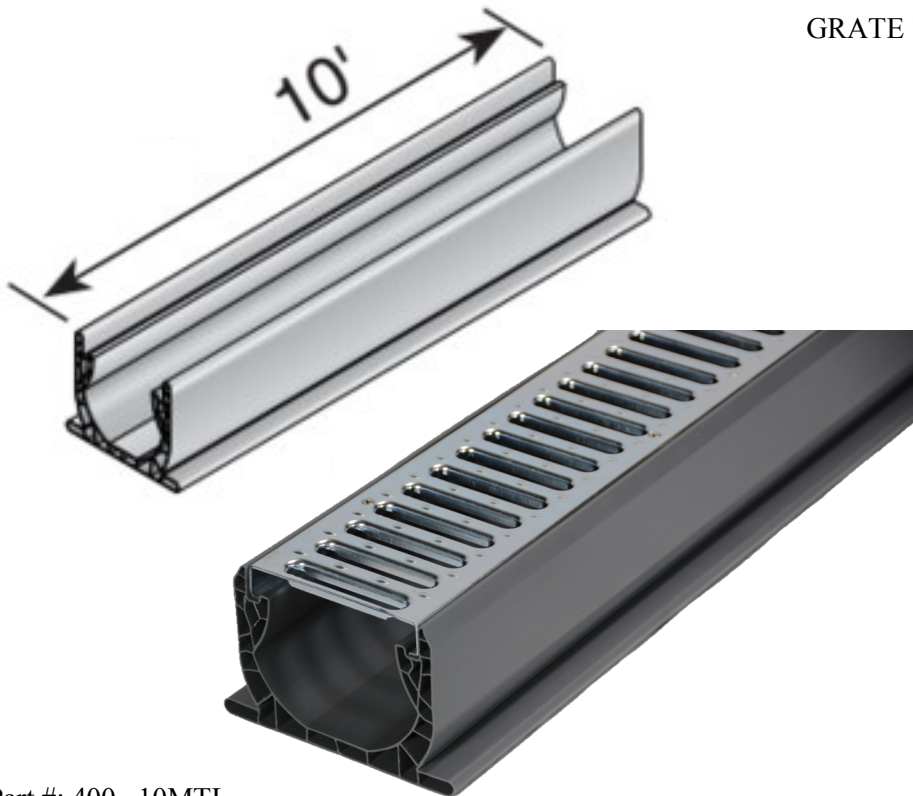

GRATE SLOT

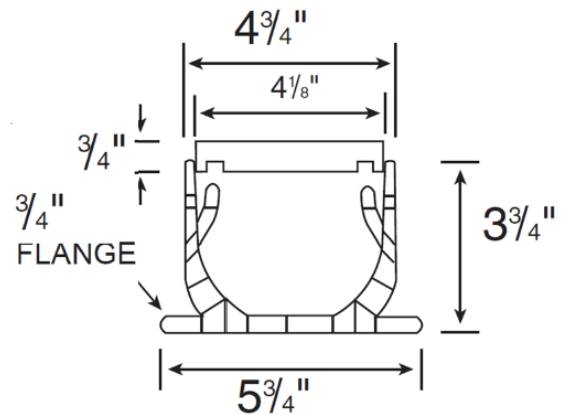

Part #: 400-10MTL
Contains: 1 x #400 Channel
5 x 2' Galvanized Steel Grate
20 x #829 Screws

Channel Material: PVC
Grate Material: Galvanized Steel
Color: Channel Gray
Grate: Galvanized Steel

UV Inhibitors
Weight: 20.5 lbs
Grate opening: 0.45" x 2.85"
Open Surface Area: 15.49 sq. in. per ft.
Flow Capacity:
47.39 GPM with 0.5" head
67.01 GPM with 1" head
Screw:
#6 x 1-1/4" Stainless steel screw Philips
flat head



Class B

- Loads of 61-175 psi.
- Recommended for medium-duty pneumatic tire traffic, autos and light trucks at speeds less than 20 m.p.h.

Note: Some installations may require a concrete collar to meet load rating. Loads are based on encasing product in concrete. Product must be installed using NDS instructions.

ADA Compliance

NDS provides a wide selection of grates that are compliant with the Americans with Disabilities Act. The [ADA Accessibility Guidelines For Buildings and Facilities](#) Section 4.5.4 specifies that ground and floor grates "shall have spaces no greater than 1/2 in (13 mm) wide in one direction."

We are pleased to provide grates that comply with these requirements, so that no individual need be limited from accessing the area safely and confidently.

To see if a grate is ADA compliant, please check the description of the product in our [NDS Drainage Catalog](#): products that meet these requirements are marked "ADA compliant."

Like to find out more about ADA compliance and NDS? Send us your question and we'd be happy to help.

