



## **SC-800 TECHNICAL SPECIFICATION**

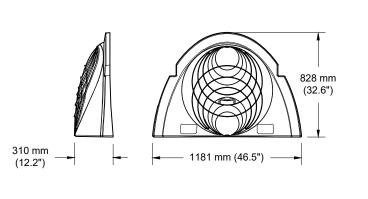







## NOMINAL CHAMBER SPECIFICATIONS

SIZE (W X H X INSTALLED LENGTH) CHAMBER STORAGE MINIMUM INSTALLED STORAGE\*

1295 mm X 838 mm X 2169 mm 1.43 m<sup>3</sup> 2.22 m<sup>3</sup> 37.1 kg

(51.0" X 33.0" X 85.4") (50.6 CUBIC FEET) (78.4 CUBIC FEET) (81.8 lbs.)

## NOMINAL END CAP SPECIFICATIONS


SIZE (W X H X INSTALLED LENGTH) END CAP STORAGE MINIMUM INSTALLED STORAGE\*\* WEIGHT

1181 mm X 828 mm X 267 mm 0.09 m<sup>3</sup> 0.42 m<sup>3</sup> 7.1 kg

(46.5" X 32.6" X 10.5") (3.4 CUBIC FEET) (14.7 CUBIC FEET) (15.7 lbs.)

PRE-CORED HOLES AT BOTTOM OF END CAP FOR PART NUMBERS ENDING WITH "BPC" PRE-CORED HOLES AT TOP OF END CAP FOR PART NUMBERS ENDING WITH "TPC"

PART#	STUB	В	С
SC800EPE06TPC	150 mm (6")	544 mm (21.4")	
SC800EPE06BPC	150 11111 (6 )		23 mm (0.9")
SC800EPE08TPC	200 mm (9")	488 mm (19.2")	
SC800EPE08BPC	200 mm (8")		25 mm (1.0")
SC800EPE10TPC	250 mm (10")	432 mm (17.0")	
SC800EPE10BPC	230 111111 (10 )		30 mm (1.2")
SC800EPE12TPC	300 mm (12")	366 mm (14.4")	
SC800EPE12BPC	300 111111 (12 )		41 mm (1.6")
SC800EPE15TPC	375 mm (15")	287 mm (11.3")	
SC800EPE15BPC	3/3/11111(13)		43 mm (1.7")
SC800EPE18TPC	450 mm (18")	203 mm (8.0")	
SC800EPE18BPC	450 11111 (10 )		51 mm (2.0")
SC800ECEZ	600 mm (24")		58 mm (2.3")



TECHNICAL SPECIFICATIONS SC-800 CHAMBER 04/18/2025 | T21-810\_C | 0 DATE: DRAWING #: StormTech ® Chamber System 4640 TRUEMAN BLVD HILLIARD, OH 43026

<sup>\*</sup> ASSUMES 150 mm (6") STONE ABOVE AND BELOW CHAMBERS, 75 mm (3") BETWEEN CHAMBERS
\*\*ASSUMES 150 mm (6") STONE ABOVE AND BELOW END CAPS, 75 mm (3") BETWEEN ROWS, 300 mm (12") BEYOND END CAPS