
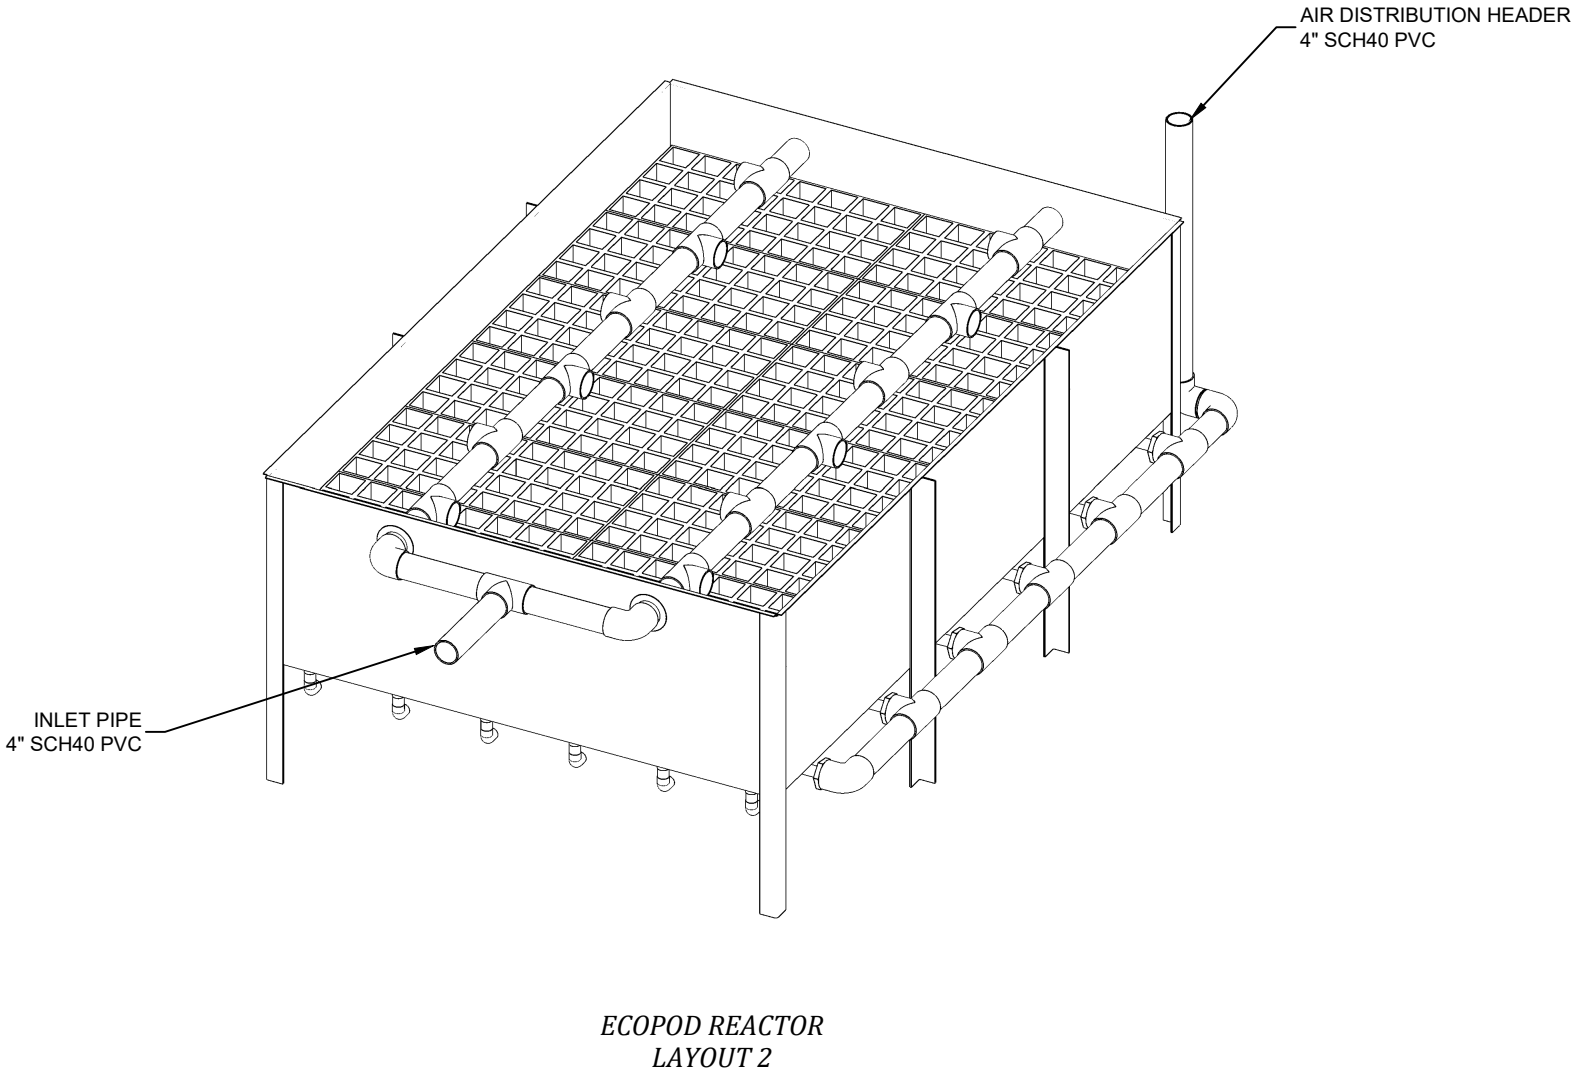


- GENERAL NOTES
- THE DRAWINGS DEPICTED HEREIN REPRESENT PRELIMINARY LAYOUTS OF A WASTEWATER TREATMENT SYSTEM CAPABLE OF TREATING THE DOMESTIC WASTE CONSTITUENTS NOTED IN TABLE 1.
  - ECOPOD REACTOR BOX SHALL BE CONSTRUCTED OF HIGH DENSITY POLYETHEYLENE (HDPE) OR AISI 304/304L STAINLESS STEEL.
  - TANK MATERIAL OPTIONS:
    - CARBON STEEL PER ASTM A36 w/COATING PER IWT STANDARDS.
    - FIBERGLASS REINFORCED PLASTIC (FRP) (NOT ALL MODELS).
    - PRECAST CONCRETE PER ENGINEER OF RECORD REQUIREMENTS, BY OTHERS.
    - CAST-IN-PLACE CONCRETE PER ENGINEER OF RECORD REQUIREMENTS, BY OTHERS.
  - BLOWERS, WEIRS, CONTROL PANELS, AND VARIOUS SMALL PARTS WILL BE SHIPPED UNASSEMBLED AND SECURELY PACKAGED, TO BE INSTALLED BY CONTRACTOR.
  - SEE INSTALLATION GUIDE FOR INSTALLATION DETAILS.
  - CONTACT AN IWT REPRESENTATIVE REGARDING DEVIATIONS FROM THESE STANDARDS.


TABLE 1 PROCESS PARAMETERS IWT E400S BOD+NITRIFICATION		
PARAMETER	MINIMUM	MAXIMUM
AVERAGE DAILY FLOW	-	4,000 GPD
PEAK DAILY FLOW	-	6,000 GPD
INFLUENT BOD <sub>5</sub>	-	10 LB/DAY
AIR TEMPERATURE	-	115 °F
WATER TEMPERATURE	68 °F	68 °F
RELATIVE HUMIDITY	10%	90%
SITE ELEVATION	0 FT AMSL	3,000 FT AMSL

TABLE 2 AIR DEMAND		
PARAMETER	UP TO 1,000 FT AMSL	1,000 TO 3,000 FT AMSL
STANDARD AIRFLOW	166 SCFM	193 SCFM
SITE AIR REQUIREMENT	187 ICFM	232 ICFM
BLOWER INLET AIR	187 ICFM	232 ICFM
AIR HEADER SIZE	4 IN	4 IN
MIN. TANK VENT X-SECT. AREA	76.9 IN <sup>2</sup> 2 EA 8" OR 1 EA 10"	95.5 IN <sup>2</sup> 2 EA 8" OR 1 EA 12"
BLOWER SELECTION	FPZ SCL K06-MS	G-D SUTORBILT 3L
NOISE LEVEL	73.0 dB(A)	ENCLOSURE DEPENDENT
AIR TEMPERATURE RISE <sup>1</sup>	21 F (11.7 C)	22 F (12.2 C)
BLOWER INLET DIAMETER	2 IN NPT	2.5 IN NPT
BLOWER OUTLET DIAMETER	2 IN NPT	2.5 IN NPT
MOTOR POWER RATING <sup>2</sup>	3 HP	3 HP
OPERATING POWER	1.9 KW	1.9 KW
1. REVIEW BLOWER DISCHARGE AIR TEMPERATURE WHEN SPECIFYING AIR MAIN PIPING MATERIAL. 2. REVIEW BLOWER MANUFACTURER CUTSHEETS FOR ADDITIONAL ELECTRICAL INFORMATION.		

TABLE 3 STANDARD EQUIPMENT LIST			
DESCRIPTION	QTY	MAKE	MODEL
ECOPOD REACTOR	1	IWT	E400S-N
BLOWER	1	PER TABLE 2	PER TABLE 2
CONTROL PANEL	1	IWT	PER DESIGN
24" S.S. EFFLUENT WEIR	1	IWT	TROUGH-3.0

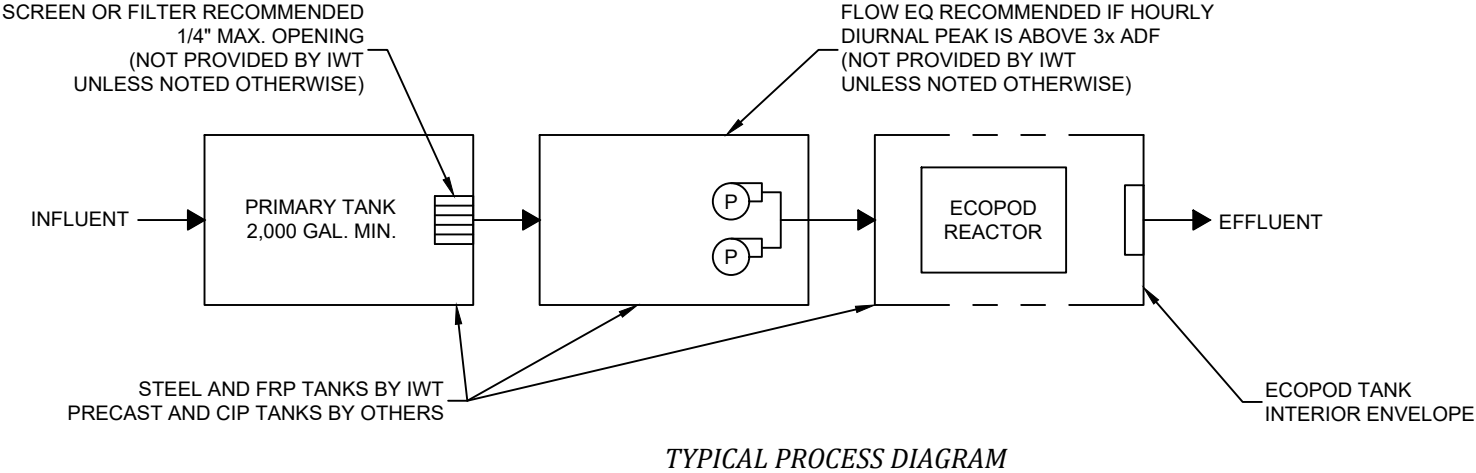

NO.	DATE	INITIALS	DESCRIPTION
A	10/12/21	AOB	ADDED TRIMETRIC VIEW



Part of **ADS**

**INFILTRATOR WATER TECHNOLOGIES, LLC**  
4 BUSINESS PARK RD, OLD SAYBROOK, CT 06475  
WWW.INFILTRATORWATER.COM  
PHONE: (800) 221-4436 / EMAIL: INFO@INFILTRATORWATER.COM

**ECOPOD E400S-N**  
**STANDARD DESIGN FOR BOD AND NITRIFICATION**

**GENERAL ARRANGEMENT**  
**DESIGN OVERVIEW**

HORIZ. SCALE N/A	PROJECT NO. N/A
VERT. SCALE N/A	DATE 02/11/2021
DRAWN BY CGK	DESIGNED BY AOB
DRAWING NO. C1.0	SHEET NO. 01 of 02

COPYRIGHT (C) 2024 INFILTRATOR WATER TECHNOLOGIES, LLC (IWT). INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND IS THE PROPERTY OF IWT. NO PART OF THIS DRAWING SHALL BE REPRODUCED, DISTRIBUTED, DISCLOSED, OR USED BY ANY PERSON OR ORGANIZATION, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN PERMISSION OF IWT. THIS INFORMATION IS BASED ON SPECIFIC INPUT PARAMETERS AND IS FOR BUDGETARY OR PRELIMINARY USE ONLY. USE AND INTERPRETATION OF THIS INFORMATION AND DETERMINING THE APPLICABILITY TO A SPECIFIC PROJECT IS AT THE SOLE DISCRETION OF THE USER AND/OR THE ENGINEER OF RECORD.

- GENERAL NOTES
- ECOPOD REACTOR BOX SHALL BE CONSTRUCTED OF HIGH DENSITY POLYETHEYLENE (HDPE) OR AISI 304/304L STAINLESS STEEL.
  - TANK MATERIAL OPTIONS:
    - CARBON STEEL PER ASTM A36 w/COATING PER IWT STANDARDS,
    - FIBERGLASS REINFORCED PLASTIC (FRP) (NOT ALL MODELS),
    - PRECAST CONCRETE PER ENGINEER OF RECORD REQUIREMENTS, BY OTHERS,
    - CAST-IN-PLACE CONCRETE PER ENGINEER OF RECORD REQUIREMENTS, BY OTHERS.
  - SEE INSTALLATION GUIDE FOR INSTALLATION DETAILS.
  - CONTACT AN IWT REPRESENTATIVE REGARDING DEVIATIONS FROM THESE STANDARDS.

TABLE 4  
MINIMUM ECOPOD REACTOR DIMENSIONS

SITE ELEVATION		REACTOR MATERIAL	LAYOUT ID	REACTOR WEIGHT		A OVERALL LENGTH		B OVERALL WIDTH		B1 AIR HEADER CL DIM	
				LB	KG	IN	CM	IN	CM	IN	CM
0-3,000	0-914	HDPE	1			321	816	61	155	34	87
0-3,000	0-914	SS	1	1,670	758	300	762	60	153	33	84
0-3,000	0-914	SS	2	1,370	622	167	425	108	275	57	145
0-3,000	0-914	SS	3	1,480	672	204	519	84	214	45	115

1. SOME REACTOR LAYOUTS NOT AVAILABLE IN FIBERGLASS TANKS. CONTACT AN IWT REPRESENTATIVE FOR DETAILS.

TABLE 5  
RECOMMENDED ECOPOD TANK  
INTERIOR ENVELOPE DIMENSIONS


DIMENSION	IN	CM
C VESSEL FRONT SPACE	12	30
D VESSEL REAR SPACE	18	46
E AIR HEADER SIDE INSIDE SPACE	6	15
F NO HEADER SIDE INSIDE SPACE	6	15

1: ADDITIONAL ACCESS HATCHES RECOMMENDED FOR SOLIDS REMOVAL ALONG VESSEL SIDES.

TABLE 6  
REQUIRED ECOPOD TANK  
INTERIOR ENVELOPE MINIMUM  
DIMENSIONS

DIMENSION	IN	CM
G INLET INVERT	50	127
H PLENUM SPACE ABOVE INLET INVERT	10	25
J MEDIA REACTOR HEIGHT	59	150
K OUTLET INVERT	47	119

1. ONE (1 EA.) INLET AND ONE (1 EA.) OUTLET ACCESS HATCH REQUIRED, 24" DIA MINIMUM.

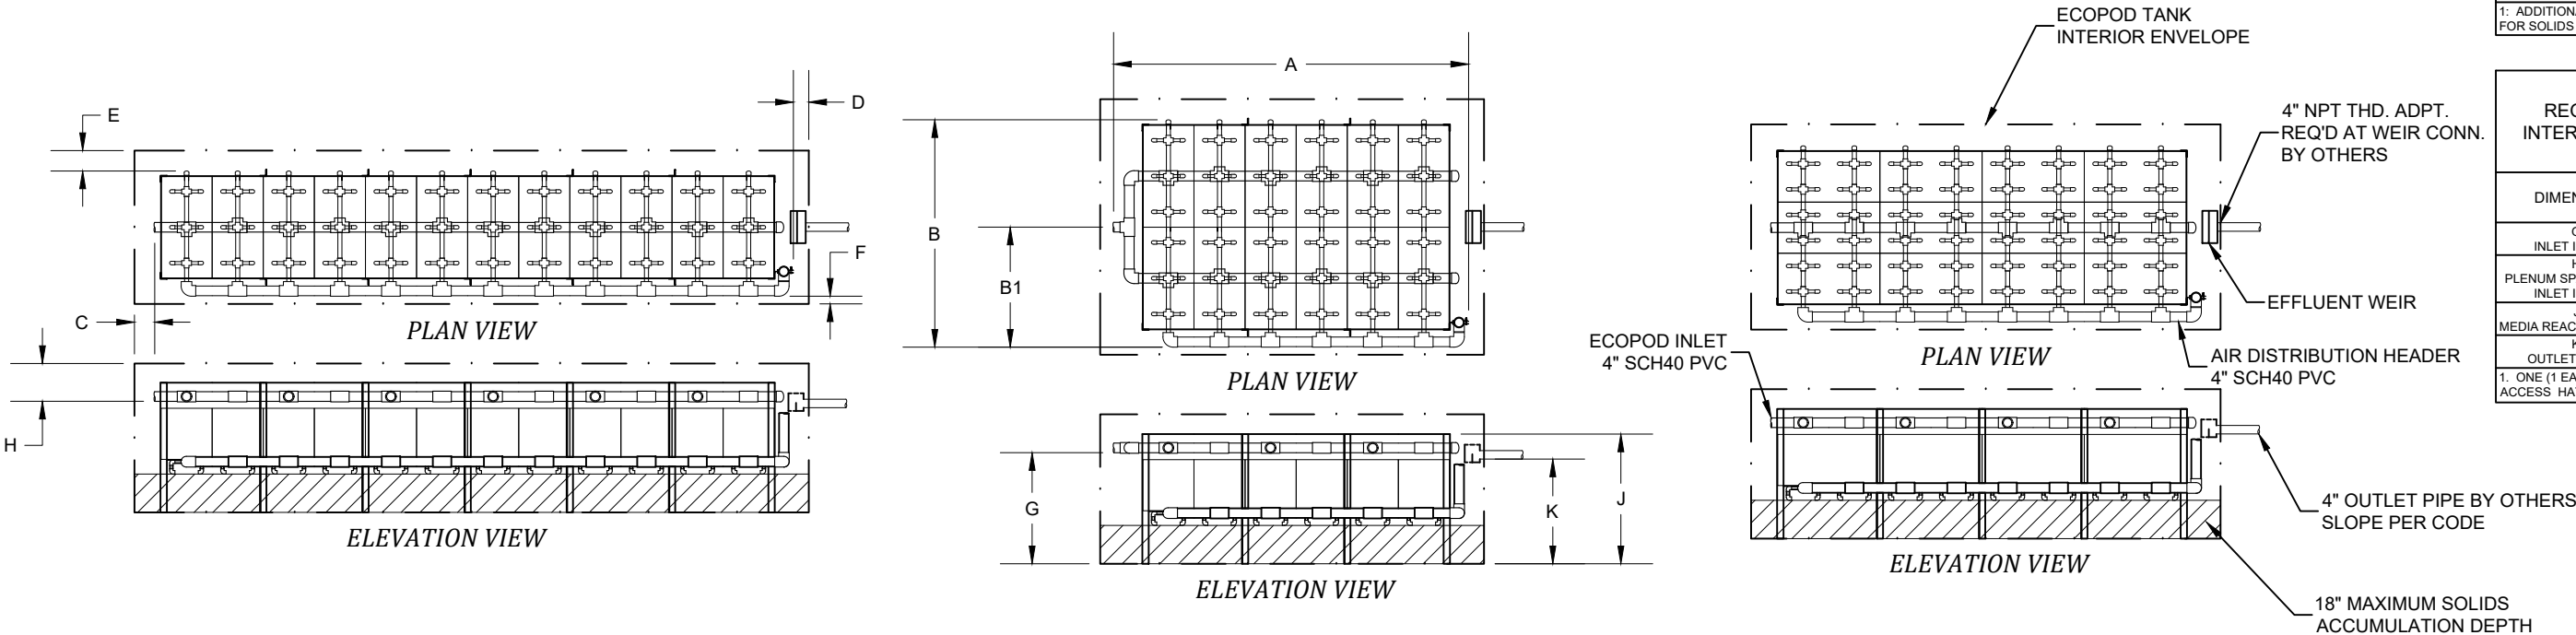

LAYOUT 1

LAYOUT 2

LAYOUT 3

NO.	DATE	INITIALS	DESCRIPTION



INFILTRATOR WATER TECHNOLOGIES, LLC  
4 BUSINESS PARK RD, OLD SAYBROOK, CT 06475  
WWW.INFILTRATORWATER.COM  
PHONE: (800) 221-4436 / EMAIL: INFO@INFILTRATORWATER.COM

COPYRIGHT (C) 2024 INFILTRATOR WATER TECHNOLOGIES, LLC (IWT). INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND IS THE PROPERTY OF IWT. NO PART OF THIS DRAWING SHALL BE REPRODUCED, DISTRIBUTED, DISCLOSED, OR USED BY ANY PERSON OR ORGANIZATION, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN PERMISSION OF IWT. THIS INFORMATION IS BASED ON SPECIFIC INPUT PARAMETERS AND IS FOR BUDGETARY OR PRELIMINARY USE ONLY. USE AND INTERPRETATION OF THIS INFORMATION AND DETERMINING THE APPLICABILITY TO A SPECIFIC PROJECT IS AT THE SOLE DISCRETION OF THE USER AND/OR THE ENGINEER OF RECORD.

ECOPOD E400S-N  
STANDARD DESIGN FOR BOD AND NITRIFICATION

GENERAL ARRANGEMENT  
LAYOUT DIMENSIONS

HORIZ. SCALE N/A	PROJECT NO. N/A
VERT. SCALE N/A	DATE 05/17/2021
DRAWN BY CGK	DESIGNED BY AOB
DRAWING NO. C1.1	SHEET NO. 02 of 02