



## **SC-740 TECHNICAL SPECIFICATION**

NTS



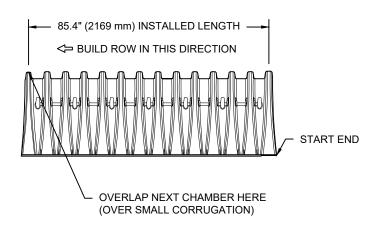

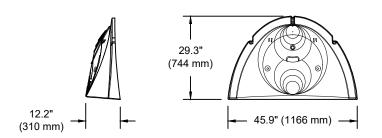



## **NOMINAL CHAMBER SPECIFICATIONS**

SIZE (W X H X INSTALLED LENGTH) CHAMBER STORAGE MINIMUM INSTALLED STORAGE\* WEIGHT 51.0" X 30.0" X 85.4" 45.9 CUBIC FEET 74.9 CUBIC FEET

75.0 lbs.

(1295 mm X 762 mm X 2169 mm) (1.30 m³) (2.12 m³) (33.6 kg)

\*ASSUMES 6" (152 mm) STONE ABOVE, BELOW, AND BETWEEN CHAMBERS

PRE-FAB STUBS AT BOTTOM OF END CAP FOR PART NUMBERS ENDING WITH "B" PRE-FAB STUBS AT TOP OF END CAP FOR PART NUMBERS ENDING WITH "T" PRE-CORED END CAPS END WITH "PC"

| PART#                       | STUB         | Α              | В              | С            |
|-----------------------------|--------------|----------------|----------------|--------------|
| SC740EPE06T / SC740EPE06TPC | 6" (150 mm)  | 10.9" (277 mm) | 18.5" (470 mm) |              |
| SC740EPE06B / SC740EPE06BPC |              |                |                | 0.5" (13 mm) |
| SC740EPE08T /SC740EPE08TPC  | 8" (200 mm)  | 12.2" (310 mm) | 16.5" (419 mm) |              |
| SC740EPE08B / SC740EPE08BPC |              |                |                | 0.6" (15 mm) |
| SC740EPE10T / SC740EPE10TPC | 10" (250 mm) | 13.4" (340 mm) | 14.5" (368 mm) |              |
| SC740EPE10B / SC740EPE10BPC |              |                |                | 0.7" (18 mm) |
| SC740EPE12T / SC740EPE12TPC | 12" (300 mm) | 14.7" (373 mm) | 12.5" (318 mm) |              |
| SC740EPE12B / SC740EPE12BPC |              |                |                | 1.2" (30 mm) |
| SC740EPE15T / SC740EPE15TPC | 15" (375 mm) | 18.4" (467 mm) | 9.0" (229 mm)  |              |
| SC740EPE15B / SC740EPE15BPC |              |                |                | 1.3" (33 mm) |
| SC740EPE18T / SC740EPE18TPC | 18" (450 mm) | 19.7" (500 mm) | 5.0" (127 mm)  |              |
| SC740EPE18B / SC740EPE18BPC |              |                |                | 1.6" (41 mm) |
| SC740ECEZ*                  | 24" (600 mm) | 18.5" (470 mm) |                | 0.1" (3 mm)  |

ALL STUBS, EXCEPT FOR THE SC740ECEZ ARE PLACED AT BOTTOM OF END CAP SUCH THAT THE OUTSIDE DIAMETER OF THE STUB IS FLUSH WITH THE BOTTOM OF THE END CAP. FOR ADDITIONAL INFORMATION CONTACT STORMTECH AT 1-888-892-2694.

<sup>\*</sup> FOR THE SC740ECEZ THE 24" (600 mm) STUB LIES BELOW THE BOTTOM OF THE END CAP APPROXIMATELY 1.75" (44 mm). BACKFILL MATERIAL SHOULD BE REMOVED FROM BELOW THE N-12 STUB SO THAT THE FITTING SITS LEVEL.