
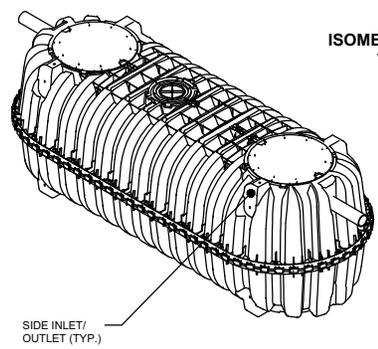



TANK EXTERIOR	
LENGTH	152.3 [3,868]
WIDTH	61.7 [1,567]
HEIGHT	54.6 [1,387]

LIQUID DEPTH	44.0 [1,118]
INVERT DROP	3.0 [76]
FREEBOARD	10.0 [254]

TOTAL CAPACITY	1,480 GAL [5,604 L]
WORKING VOLUME	1,278 GAL [4,839 L]

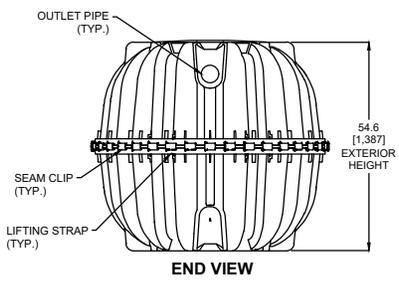

NOTES:

1. ALL DRAWING DIMENSIONS IN INCHES [MILLIMETERS] OR AS NOTED.
2. EXTERIOR OF ACCESS OPENING LID INCLUDES THE FOLLOWING WARNING IN ENGLISH, FRENCH & SPANISH: "DANGER DO NOT ENTER: POISON GASES."
3. TANK MARKINGS INCLUDE: MANUFACTURER NAME, MODEL NUMBER, LIQUID CAPACITY, DATE OF MANUFACTURE, MAXIMUM BURIAL DEPTH, INLET, AND OUTLET.
4. MAXIMUM BURIAL DEPTH IS 48 in [1,219 mm].
5. MINIMUM BURIAL DEPTH IS 6 in [152 mm].
6. TANK IS FOR NON-TRAFFIC APPLICATIONS.
7. AIRSPACE IS 15.8%.
8. OUTLET TEE IS COMPATIBLE WITH AN EFFLUENT FILTER.
9. LENGTH TO WIDTH RATIO IS 2.8:1 (143.9-INCH LENGTH / 51.8-INCH WIDTH = 2.8).
10. NOMINAL WALL THICKNESS IS 0.2 in [5 mm].

<p>Infiltrator[™] Water Technologies Part of ADS</p>	<p>IM-Tank</p>	DRAWN BY EA
		DATE 05/12/2025
INFILTRATOR WATER TECHNOLOGIES, LLC 4 BUSINESS PARK RD, OLD SAYBROOK, CT 06475 WWW.INFILTRATORWATER.COM PHONE: (800) 221-4436 / EMAIL: INFO@INFILTRATORWATER.COM	IM-1250 1-COMPARTMENT SEPTIC TANK CONFIGURATION	SCALE NTS
		SHEET NO. 01 of 02

Q:\Market Development\Archive\Drawings for the Infiltrator website - PDF & DWG\Septic Tanks\IM Series\IM-1250_1 and 2_compartment.dwg